

A

## EXPRESS MAIL CERTIFICATE

"Express Mailing" label number: EL523753254USDate of Deposit: November 24, 1999

I hereby certify that this paper is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Linda S. Lawson  
(Typed or printed name of person mailing paper or fee)

Linda S. Lawson  
(Signature of person mailing paper or fee)

10530 U.S. PTO

09/15/99

11/24/99

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Hartley et al.

Atty. Docket No.: PA-5169-CON

Title: A PROSTHESIS AND A METHOD AND MEANS OF DEPLOYING A PROSTHESIS

ASSISTANT COMMISSIONER FOR PATENTS  
WASHINGTON, D.C. 20231

SIR:

Enclosed are the following papers relating to the above-named application:

Specification ( 35 pages)  
Declaration & Power of Attorney ( 3 pages)  
Assignment (1 page); Recordation Form Cover Sheet  
Formal drawing ( 17 sheets)  
Associate Power of Attorney

## CLAIMS AS FILED

BASIC FILING FEE	NO. FILED	NO. ALLOWED	NO. EXTRA	RATE
				\$ 760.00
Total Claims	63	- 20 =	43 X	\$18.00 = \$ 774.00
Independent Claims		- 3 =	1 X	\$78.00 = \$ 78.00
Multiple Dependent Claims(s), if applicable	17			+ \$260.00 = \$ 260.00
				FILING FEE: \$1,872.00
Assignment, if applicable				\$40.00 + \$ 40.00
				TOTAL FEES DUE \$1,912.00

Please file the application and charge our Deposit Account No. 13-2528, in the amount of 1,912.00 to cover the filing fee. In the event of improper payment of a required fee, the Commissioner is authorized to charge or to credit Deposit Account No. 13-2528 as required to correct the error.

Please address all correspondence to:

Anton P. Ness  
Patent Attorney  
P.O. Box 2269  
Bloomington, IN 47402-2269

Respectfully,

Date: November 24, 1999

  
\_\_\_\_\_  
Attorney for Applicant  
Anton P. Ness  
Reg. No. 28,453

Tel. No.: (812) 330-1824

EXPRESS MAIL CERTIFICATE	
"Express Mailing" label number:	<u>EL523753254US</u>
Date of Deposit:	<u>November 24, 1999</u>
I hereby certify that this paper is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner of Patents, Washington, D.C. 20231.	
<u>Linda S. Lawson</u> (Typed or printed name of person mailing paper or fee)	
<u><i>Linda S. Lawson</i></u> (Signature of person mailing paper or fee)	

A PROSTHESIS AND A METHOD AND MEANS OF DEPLOYING A PROSTHESIS

Cross Reference to Related Copending Application

This application is a continuation of International Application  
Number PCT/AU98/00383 filed May 25, 1998 and Australian Application  
5 Number PO 7008 filed May 26, 1997.

TITLE: A PROSTHESIS AND A METHOD AND MEANS OF  
DEPLOYING A PROSTHESIS

5

FIELD OF INVENTION

This invention relates to a method and means for introducing a expandable intraluminal prosthesis which may be straight, tubular or bifurcated in form and intended for the endovascular repair of diseased or damaged vessels and to a prosthesis which is suitable for such a procedure.

1 0

Throughout this specification the terms proximal and proximally are used for a position or direction towards the patient's heart and the terms distal and distally are used for a position or direction away the patient's heart.

BACKGROUND OF THE INVENTION

The deployment of intraluminal prostheses into the lumen of a patient from a remote location by the use of a deployment device or introducer has been disclosed in a number of earlier patent specifications.

1 5

United States Patent No. 4,562,596 in the name of Kornberg proposes the retention of a self expanding graft within a sleeve until it is to be deployed at which time the sleeve is withdrawn and the graft allowed to expand. After the graft has been released there is no possible control of the position of the distal end of the graft. Inadequate placement can render the entire deployment null and void.

2 0

United States Patent No. 4,665,918 in the name of Garza et al proposes a system and method for the deployment of a prosthesis in a blood vessel. The prosthesis is positioned between a delivery catheter and an outer sheath and expands outwardly upon removal of the sheath. Once again after the prosthesis has been released by removal of the sheath there is no possible control of the position of the either end of the prosthesis.

2 5

United States Patent No. 4,950,227 in the name of Savia et al proposes the delivery of a stent by mounting the stent to the outside of an inflatable catheter and retaining the ends of an unexpanded stent by fitting sleeve over

3 0

either end of the stent. Expansion of the stent is caused by inflation of the catheter between the sleeves so that the ends of the stent are withdrawn from the respective sleeves and the stent released and expanded into position.

- 5 This system provides very little control over the deployment procedure and in practice would be impractical for intraluminal deployment where accuracy is vital.

European Patent specification No. 472 731 In the name of Inoue proposes an artificial tube prosthesis to be inserted into a human organ in a folded condition retained within a catheter and released to expand within the organ.

- 10 Deployment is achieved by retention of the proximal end of the prosthesis by wires passing through a tube through the middle of the prosthesis while withdrawing the catheter. A balloon is then used to expand the prosthesis. Once again after the prosthesis has been released by removal of the catheter there is no possible control of the position of the distal end of the prosthesis.

- 15 United States Patent No. 5,071,407 in the name of Termin et al proposes the delivery of a stent by retaining the stent in an elastically deformed condition between a catheter and a sheath. The proximal end of the stent is retained at the catheter. The stent is allowed to expand by removal of the sheath and optional balloon expansion. No indication is given of any method for release  
20 of the stent from the catheter or how the distal end of the stent can be positioned accurately.

- Australian Patent Application No. 669,338 in the name of Chuter proposes a delivery arrangement for transluminally positioning a prosthesis at a particular position on an internal wall of a lumen. The delivery arrangement  
25 has an outer sheath to surround the prosthesis and a retention arrangement to hold the prosthesis in a selected position during removal of the sheath before final release.

- Australian Patent Application No. 671,910 in the name of Endovascular Technologies, Inc. proposes a delivery arrangement for positioning a  
30 prosthesis within a lumen. It has capsules which retain each end of the prosthesis and a balloon arrangement to expand the prosthesis when the capsules have been retracted to release the prosthesis. A sheath is used to protect the prosthesis during insertion. Once the capsules have been withdrawn there is no method provided to ensure that the ends of the

prosthesis are correctly positioned.

It is the object of this invention to provide a graft and a method and apparatus to deploy the graft prosthesis which will overcome at least some of the problems discussed above or at least provide an alternative arrangement to the prior art systems described above.

## BRIEF DESCRIPTION OF THE INVENTION

According to one aspect of the present invention there is provided an introducer for positioning an expandable endovascular prosthesis in a lumen of a patient, the prosthesis having a proximal portion and a distal portion, the introducer comprising a prosthesis positioning mechanism selectively releasable from the prosthesis when the prosthesis is positioned at a desired site in the lumen of a patient, a first control member controlling at least the longitudinal position of the proximal portion of the prosthesis; and a second control member controlling at least the longitudinal position of the distal portion of the prosthesis. The prosthesis positioning mechanism can include a distal attachment region and/or a proximal attachment region. The distal attachment region can include a distal attachment device. The proximal attachment region can include a proximal attachment device. The prosthesis positioning mechanism can preferably include a control arrangement for controlling the length of the prosthesis. The prosthesis positioning mechanism can also preferably include a rotational arrangement by which the relative angular orientation of the proximal and distal portions of the prosthesis can be adjusted. This prosthesis positioning mechanism can singly or in combination also adjust the angular orientation of the prosthesis. The introducer can also preferably comprise an expansion control mechanism for controlling expansion of the prosthesis when the prosthesis is positioned at the desired site in the lumen of the patient.

According to another aspect of the present invention therein provides an endovascular arrangement for positioning an expandable prosthesis at a desired location in a lumen of a patient, said arrangement comprising a control section to be maintained external to the patient, and a prosthesis positioning mechanism controllable by the control section for moving and manipulating the prosthesis to a desired location in the lumen, wherein a first member extends from the control section to a proximal region of the

positioning mechanism, the proximal region of the positioning mechanism having means for controlling the proximal end of the prosthesis, wherein a second member extends from the control section to a distal region of the positioning mechanism, the distal region having means for controlling the

5 distal end of the prosthesis in cooperation with the second member. The arrangement further preferably comprises contraction means for containing self-expanding stents of the prosthesis during insertion of the prosthesis positioning mechanism into the lumen and/or expansion means for

10 expanding expandable stents of the prosthesis when the prosthesis is positioned at the desired site in the lumen of the patient. The contraction means preferably includes tubular means that extends from the control section to the positioning mechanism and serves to contain the prosthesis during insertion of the positioning mechanism into the lumen and to control

15 the distal end of the prosthesis when the tubular means has been moved in a distal direction relative to the first and second members, relative movement between the first and second members enabling manipulation of the prosthesis when in the lumen. The expansion means includes at least radial means such as preferably an inflatable balloon for radially expandable stents of the prosthesis when the prosthesis is positioned at the desired location in

20 the lumen. The first and second members can be contained within the said tubular means. Means can be provided for clamping the first and second members together during insertion of the prosthesis and for releasing the first and second members prior to the manipulation. Expansion of a non self expanding prosthesis can be performed by expansion of a balloon located

25 around the first member and within the prosthesis, said balloon being inflatable from the control section. The proximal region of the attachment mechanism can contain tubular means for containing the proximal end of the prosthesis prior to final positioning thereof, and release of the prosthesis from the tubular means can be achieved by proximal movement of the first

30 member. The second member has means for controlling the distal end of the stent whilst the latter is inside tubular means. The arrangement can further comprise release mechanisms in the control section for controlling wires extending to respective stents of the prosthesis. The prosthesis positioning mechanism can preferably include a control arrangement for controlling the

35 length of the prosthesis. The prosthesis positioning mechanism can also preferably include a rotational arrangement by which the relative angular orientation of the proximal and distal portions of the prosthesis can be adjusted. This prosthesis positioning mechanism can singly or in

combination also adjust the angular orientation of the prosthesis. The introducer can also preferably comprise an expansion control mechanism for controlling expansion of the prosthesis when the prosthesis is positioned at the desired site in the lumen of the patient.

- 5 The above introducer and/or arrangement can be used to locate expandable prosthesis or self-expandable prosthesis. If the former are used, then one or more balloons, inflatable from a control section or external the patient, can be used.

- 1 0 The first member in the endovascular arrangement can either be fixed to an extension or the member can actually be shaped into the form of the extension .

- 1 5 The first and second control members of the introducer can singly or in combination preferably include a trigger wire positioned at the proximal and/or distal ends of the prosthesis. The trigger wire(s) can preferably extend to one or more release mechanisms external to patient for releasing the prosthesis from the positioning mechanism when the prosthesis is positioned at the lumen site in the patient.

- 2 0 Some form of container or expansion control mechanism can be used to contain that end while the remainder of the prosthesis is being manipulated in the lumen of the patient. It is after the manipulation has been executed that the container is removed by operation of the various control members.

- 2 5 In another aspect of the invention, the introducer or endovascular arrangement of the invention can also comprise a control arrangement for controlling the length of the prosthesis during the manipulation in the patient.
- 3 0 In one aspect, the control arrangement or members can preferably include coaxial tubes which are connected to the respective ends of the prosthesis for rotation thereof. When the control members are locked together, the entire prosthesis can be rotated in the lumen of the patient. Alternatively, the control arrangement and/or members can be individually controlled for rotating the relative ends of the prosthesis with respect to each other. In the same or opposite directions.

The sleeve can be independently located relative to the control arrangement



and/or the first and second control members. The control arrangement or members can also be contained within the sleeve. The sleeve can preferably be a tube, wraps of wire, or can be a tube with wire therein. The  
5      aforementioned trigger or release wires can also be contained in the sleeve tube or in the wall of the tube.

With respect to expandable prosthesis, the expansion means for expanding expandable stents of the prosthesis can preferably include one or more balloons (more preferably three balloons) for advantageously and  
10     independently expanding the proximal and distal portions of the prosthesis as well as the mid section thereof.

In an alternate form the invention may be said to reside in an introducer adapted for the introduction of a self expanding endovascular prosthesis into a lumen of a patient, the prosthesis having a proximal end and a distal end, the introducer comprising, a proximal attachment device adapted to be  
15     attached to the proximal end of the prosthesis, a distal attachment device adapted to be attached to the distal end of the prosthesis, each of the proximal and distal attachment devices attaching to the prosthesis in such a manner that the prosthesis can be held in tension therebetween and that each end of the prosthesis can be individually moved in proximal and distal  
20     directions and be rotated, and proximal releasing means associated with the proximal attachment device and distal releasing means associated with the distal attachment device to enable selective releasing of the proximal and distal ends of the prosthesis.

In a preferred form of the invention the proximal attachment means has a  
25     long tapering flexible extension on its proximal end to facilitate insertion of the introducer into a body lumen and its advancement along the lumen.

The proximal attachment device may be mounted on a flexible thin walled tube which extends in a distal direction from the proximal attachment device to an external manipulation section of the introducer which is adapted to  
30     remain external of the patient.

The thin wall metal tube may include fluid connection means external of the patient to enable the introduction of a medical reagent therethrough.

The long flexible extension may include a hollow tube therethrough in fluid communication with the thin wall metal tube and a plurality of side holes to enable dispersion of the medical reagent proximal of the prosthesis.

- 5 In a preferred form of the invention the distal attachment device is mounted on a flexible thick walled tubing and coaxial on the thin walled tube and extending in a distal direction to the external manipulation section and mounted such that the respective tubes can be moved together or independently.

- 10 There may be further included a haemostatic seal between the thin walled tube and the thick walled tube in the manipulation section.

There may be further included means to introduce a medical reagent into an annular space defined between the thin walled tube and the thick walled tube.

- 15 In a preferred form of the invention there may be a proximal trigger wire extending from the proximally attachment device to the manipulation section, the proximal trigger wire being adapted to activate the proximal releasing means and a distal trigger wire extending from the distal attachment device to the manipulation section, the distal trigger wire being adapted to activate the distal releasing means.

- 20 In a preferred form of the invention there may be included an external release mechanism for each of the proximal trigger wire and distal trigger wire, the external release mechanism adapted to prevent accidental release of the trigger wires and to allow release of the distal releasing means only after release of the proximal releasing means.

- 25 Preferably there is a haemostatic seal around the respective trigger wires in the manipulation section.

- 30 The introducer may also include an external sheath extending from external of the patient to cover and compress the prosthesis during insertion of the introducer into a patient and movable longitudinally from outside the patient to expose the prosthesis.

The external sheath may be coaxial with and a sliding fit on the thick walled tube. The external sheath may have a proximal end which is tapered and smoothed to present a low resistance to advancement of the introducer during insertion. The proximal end of the external sheath may also be adapted to have a tight fit on to the proximal attachment device.

Preferably the distal attachment device is of a streamlined shape and is adapted to be advanced to the proximal attachment device whereby to allow smooth retrieval through the released prosthesis and into the external sheath for removal from a patient.

The introducer according to this invention may be used with a straight tubular self expanding prosthesis or it may be used where the prosthesis is a bifurcated prosthesis.

The introducer according to this invention may be used where the lumen of the patient is an aorta and the prosthesis is adapted to repair an aortic aneurism.

In an alternative form the invention is said to reside in a method of placing a prosthesis into an internal lumen by means of an insertion assembly the method including the steps of; inserting the insertion assembly including the prosthesis into the internal lumen, withdrawing a sheath from the insertion assembly to expose the prosthesis, releasing the prosthesis from the insertion assembly, replacing the sheath onto the insertion assembly, and retracting the insertion assembly.

Preferably the prosthesis has a proximal end and a distal end and the insertion assembly includes a proximal attachment device and a distal attachment device adapted to retain the proximal and distal ends of the prosthesis respectively and the step of releasing the prosthesis includes the steps of releasing the proximal end and then the distal end.

The step of replacing the sheath onto the insertion assembly may include the step of advancing the distal attachment device up to the proximal attachment device and withdrawing the two devices together.

Between steps (b) and (c) the prosthesis may be manipulated by respective

movements longitudinally and rotationally of the proximal attachment device and distal attachment device to correctly position the prosthesis.

- Where the prosthesis is a bifurcated prosthesis the step of withdrawing the sheath may include the steps of withdrawing the sheath to a first position in which a side arm of the prosthesis is exposed, insertion of an extension prosthesis into the side arm and then full removal of the sheath from the prosthesis.

- Preferably the step of insertion of the extension prosthesis into the side arm comprises the steps of, inserting an extension insertion assembly into the side arm, the extension insertion assembly including a top guide mounted on a catheter, an extension prosthesis on the catheter and a sheath retaining the extension prosthesis and extending over the top guide, withdrawing the sheath to expose and deploy the extension prosthesis, withdrawing the sheath, top guide and catheter together.

- The top guide may include a long proximal nose extension and the catheter may include a distal stop with the extension prosthesis being mounted between the distal stop and the top guide.

- In an alternative form the prosthesis is a bifurcated prosthesis and the step of withdrawing the sheath includes the steps of withdrawing the sheath to a first position in which a first side arm of the prosthesis is exposed, insertion of a first extension prosthesis into the first side arm, then full removal of the sheath from the prosthesis to expose a second side arm and then insertion of a second extension prosthesis into the second side arm.

- The steps of insertion of the first and second extension prosthesis into the first and second side arms comprises the same steps as discussed above.

- In a further form the invention is said to reside in an intraluminal prosthesis having a tubular graft and a plurality of self expanding stents along the length of the graft the prosthesis having a proximal end and a distal end, the prosthesis being characterised by the stents at the proximal end and at the distal end being inside the tubular graft and the remainder of the stents being on the outside of the graft.

There may be further included a further self expanding stent mounted to the proximal end of the graft and extending beyond the said proximal end. The further stent may include attachment devices. The attachment devices may comprise barbs extending towards the distal end of the prosthesis.

- 5 The prosthesis may be bifurcated at its distal end to provide a shorter prosthesis leg and a longer prosthesis leg. The shorter leg may have a terminal stent on the outside of the prosthesis and the longer leg have the internal distal stent.

- 1 0 There may also be an extension prosthesis for insertion into the shorter prosthesis leg, the extension prosthesis comprising a tubular extension prosthesis and a plurality of self expanding stents, the extension prosthesis having a proximal end and a distal end, stents at the proximal and distal ends being inside the tubular extension prosthesis and the remaining stents being on the outside of the prosthesis.

- 1 5 The intraluminal prosthesis may be constructed so that both the shorter leg and longer leg have external terminal stents and extension prostheses for each leg, each extension prosthesis comprising a tubular extension prosthesis and a plurality of self expanding stents, the extension prosthesis having a proximal end and a distal end, stents at the proximal and distal ends  
2 0 being inside the tubular extension prosthesis and the remaining stents being on the outside of the prosthesis.

Each stent of the intraluminal prostheses according to this invention may be a zig-zag stent.

- 2 5 Generally it will be seen that by this invention there is provided an arrangement by which a prosthesis can be compressed into a thin insertion device and then the insertion device advanced through a vessel such as a femoral artery until the prosthesis is substantially in the position required and then by careful positioning before release of the attachment means at a proximal end of the prosthesis and then repositioning if necessary before  
3 0 release of the distal end of the prosthesis, the prosthesis can be placed and released accurately.

DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

The construction of preferred embodiments and the method by which the device may be operated may be made clearer with the aid of the accompanying drawings which show preferred embodiments of the invention and the method by which the device of the various embodiments may be used. For the purpose of clarity the lumens or vessels into which the prosthesis is to be inserted is not been shown in the drawings except in FIG 18.

In the drawings:

FIG 1 shows a first embodiment of an introducer according to this invention in perspective view with the prosthesis partially deployed,

FIG 2 shows the first embodiment of the introducer as shown in FIG 1 being fully loaded and ready for introduction into a patient,

FIG 3 shows the embodiment of FIG 2 in the next stage of deployment of the prosthesis,

Fig 4 shows the embodiment of FIG 2 with the release of the proximal end stage of deployment,

FIG 5 shows the release of the distal end stage of deployment,

FIG 6 shows the advancement of the distal attachment device to the proximal attachment device,

FIG 7 shows the withdrawal of the introducer,

FIG 8 shows that part of the introducer around the distal end of the prosthesis in detail,

FIG 8A shows an alternative embodiment of that part of the introducer around the distal end of the prosthesis in detail,

FIG 8B shows the embodiment of FIG 8A with the distal attachment device advanced to the proximal attachment device,

FIG 9 shows that part of the introducer around the proximal end of the prosthesis in detail,

FIG 10 shows that part of the introducer around the haemostatic seal in detail,

5 FIG 11 shows that part of the introducer around the trigger wire release mechanisms in detail,

FIG 12 shows that part of the introducer around the pin vice clamp and the medical reagent introduction tube in detail,

10 FIGS 13A - 13C show portions of an alternative embodiment of introducer according to this invention adapted for introduction of a bifurcated prosthesis,

FIG 14 shows an alternative embodiment of introducer according to this invention adapted for introduction of an extension prosthesis,

15 FIG 15 shows an embodiment of a bifurcated prosthesis with an extension prosthesis according to this invention,

FIG 16 shows an embodiment of a bifurcated prosthesis with two extension prostheses according to this invention,

FIG 17 shows an embodiment of a prosthesis according to this invention intended for aortouni-iliac deployment, and

20 FIG 18 shows a deployed prosthesis according to this invention within an aorta with an aneurism.

Now looking more closely at the drawings and particularly in the embodiment shown in FIGS 1 - 12 it will be seen that an endovascular arrangement such as the introducer according to this invention comprises generally an external  
25 manipulation section 1, a distal attachment region 2 and a proximal attachment region 3.

The proximal attachment region 3 shown in detail in FIG 9 includes a

- cylindrical sleeve 10 with a long tapered flexible extension 11 extending from its proximal end. The extension 11 has an internal longitudinal aperture 12 to enable it to be advanced along an insertion wire 13 and to enable the supply of medical reagents such as by the use of a contrast agent to allow angiography to be performed during placement and deployment phases of the medical procedure. A thin walled metal tube 15 is fastened to the extension 11 and extends through the complete introducer to the manipulation section and terminates in a connection means 16 for a syringe so that the medical reagent may be introduced into the metal tube and subsequently the extension 11 to emanate through the apertures 14. The thin walled metal tube 15 is flexible so that the introducer can be advanced along a relatively tortuous vessel such as the femoral artery and also to allow manipulation longitudinally and rotationally of the proximal attachment region 3.
- 1 5 The prosthesis 20 is of a self expanding type having resilient stents 19 to enable it to expand after it is released from the introducer. The prosthesis retained within the introducer includes a self expanding zigzag stent 21 extending from its proximal end and in the compressed condition the zigzag stent 21 is retained in the cylindrical sleeve 10 of the proximal attachment region 3 and retained in there by means of a trigger wire 22 which extends through an aperture 23 in the side of the proximal attachment device 10 and is received in one of the loops of the zigzag stent. The trigger wire 22 extends along most of the length of the introducer and exits at the manipulation region at a proximal wire release mechanism 24.
- 2 0 The prosthesis 20 is retained in its compressed condition by means of an external sleeve 30 which is advanced to be received over the cylindrical sleeve 10 of the proximal attachment device 10 when the device is assembled for insertion as can be particularly seen in FIG 2. The external sheath 30 extends distally to external of a patient to the external manipulation section and a gripping and haemostatic sealing means 35 thereof.
- 3 0

As can be particularly seen in FIG 8, the distal end of the prosthesis 20 is retained in the distal attachment device 40 which is mounted onto a thick walled plastics tube 41 which extends distally to external of the patient and to the manipulation region 1. The thick walled tube is coaxial with and radially outside the thin walled tube 15 and the sheath 30 is coaxial with and radially

3 5



outside the thick walled tube 41. The distal end 42 of the prosthesis 20 has a loop 43 through which a distal trigger wire 44 extends. The distal trigger wire extends through an aperture 45 on the distal attachment device into the annular region between the thin walled tube 15 and the thick walled tube 41 like the proximal trigger wire which also extends through the annular space between the thick walled tubing 41 and the thin walled tubing 15 to the manipulation device and out at a distal wire release mechanism 25 as depicted in FIG 2.

In the alternative embodiment as shown in FIGS 8A and 8B, the thick walled tube 160 has a tapered end 161 through the thin walled tube 162 extends. A low friction lining 163 is provided between the thick walled tube 160 and the thin walled tube 162 so that the former slides easily over the latter. The proximal release wire 165 and the distal release wire 167 are within the thick walled tube 160 and extend out respective apertures 166 and 168 distal of the tapered portion 161. the distal release wire 167 passes through the loop 170 in the distal end of the prosthesis 171 and re-enters the tapered portion 161 through aperture 172.

As shown in FIG 8B when the distal attachment region has been advanced to the proximal attachment region the tapered portion 161 fits into the tube 175 to provide a smooth surface for the retraction of the two together.

As can be particularly seen in FIG 10 the haemostatic seal which remains external of a patient in use has a clamping collar 26 which clamps the external sleeve 30 to the haemostatic seal 27. The haemostatic seal 27 has a silicone seal ring 28 to seal against the thick walled tubing 41 to provide the haemostatic seal and a side tube 29 for the introduction of medical reagents between the thick walled tubing 41 and the external sleeve 30.

As can be particularly seen in FIG 11 the release wire actuation section of the external manipulation section has a body 36 into the end of which is mounted the thick walled tubing 41 and through which passes the thin walled tube 15. Both the proximal wire release mechanism 24 and the distal wire release mechanism 25 are mounted for slidable movement on the body 36. Their positioning is such that the proximal wire release mechanism 24 must be moved before the distal wire release mechanism 25 can be moved. This means that the distal end of the prosthesis cannot be released until the

proximal end of the prosthesis has been released. Clamping screws 37 are provided on each of the proximal wire release mechanism 24 and distal wire release mechanism 25 to prevent inadvertent early release of either end of the prosthesis. A haemostatic seal 38 is provided so the respective release wire can extend out through the body 36 to the respective release mechanisms.

As can be particularly seen in FIG 12 there is a pin vice 39 mounted onto the other end of the body 36 from the thick walled tube 41. The pin vice 39 has a screw cap 46 which when screwed in clamps vice jaws 47 against the thin walled metal tube 15 so that the thin walled tube 15 can only move with the body 26 and hence the thin walled tube can only move with the thick walled tube 41. With the clamp tightened the entire assembly except the external sleeve 30 can be moved as one.

We now looking at FIG 2 to 7 which show the various stages of the deployment of the prosthesis according to this embodiment of the invention.

A guide wire (not shown) is introduced into the femoral artery and advanced until its tip is above the region into which the prosthesis is to be deployed.

In FIG 2 the introducer assembly is shown fully assembled ready for introduction into a patient. The prosthesis 20 is retained at each of its ends by the proximal and distal retaining assemblies respectively and compressed by the external sleeve 30. If it is an aortic aneurism which is to be grafted the introducer assembly can be inserted through a femoral artery over the guide wire in the form as shown in FIG 2 and positioned by radiographic techniques (not discussed here).

In FIG 3 it will be seen that once the introducer assembly is in a selected position the external sheath 30 is withdrawn to just proximal of the distal attachment device 40 so that the prosthesis 20 is now released so that it can expand radially except where the most proximal zigzag stent 21 is still retained within the proximal attachment device 10 and where its distal end 42 is retained within the external sheath 30.

By release of the pin vice 39 to allow small movements of the thin walled tubing 15 with respect to the thick walled tubing 41 the prosthesis 20 may

now be lengthened or shortened or rotated or compressed to accurately place in the desired place within the body lumen. X-ray opaque markers (not shown) may be placed at known places along the prosthesis to assist with placement of the prosthesis.

- 5 In FIG 4 the proximal trigger wire 22 (FIG 3) has been withdrawn by distal movement of the proximal wire release mechanism 24 (FIG 3). At this stage the proximal wire release mechanism 24 and the proximal trigger wire 22 have be removed completely by passing the proximal wire release mechanism 24 over the pin vice 39,46 and the connection means 16 for a  
1 0 syringe. The screw cap 46 of the pin vice 39 has then been loosened so that the thin walled tubing 15 can be pushed in a proximal direction to move the proximal attachment means 10 in a proximal direction thereby releasing the zigzag stent 21 at the proximal end of the prosthesis from the proximal attachment means 10. At this stage the hooks or barbs 26 on the zigzag stent  
1 5 21 grip into the walls of the lumen to hold the prosthesis therein. From this stage the proximal end of the prosthesis cannot be moved again.

- The distal end of the prosthesis 42 is still retained by the distal attachment means 40 with the loop 43 retained therein. The external sheath 30 has been withdrawn to distal of the distal attachment device 40 to allow the distal  
2 0 end of the attachment device to expand.

- At this stage, however, the distal end of the prosthesis can still be moved so that the prosthesis can be rotated or lengthened or shortened or otherwise moved to accurately position the prosthesis. Where the prosthesis to be deployed is a bifurcated graft the movement at this stage can ensure that the  
2 5 shorter leg is directed in the direction of the contra-iliac artery

- In FIG 5 the distal end 42 of the prosthesis has been released by removal of the distal trigger wire 44. At this stage the distal wire release mechanism 25 and the distal trigger wire 44 can be removed completely by passing the distal wire release mechanism 25 over the pin vice and the connection  
3 0 means 16 for a syringe. The loop 43 of the terminal distal zigzag stent is hence freed and the prosthesis is now free to expand to the walls of the vessel and the introducer is ready to be removed.

The first stage of removal is shown in FIG 6 where the distal attachment

device 40 is advanced to be received in the rear of the proximal attachment device 10 and then the proximal attachment device 10 including the tapered flexible extension 11 and the distal attachment device 40 are removed together as shown in FIG 7. In this drawing the external sleeve 30 has been  
 5 advanced to cover the join between the proximal attachment device 10 and the distal attachment device 40 and is also removed with the proximal attachment device 10, the tapered flexible extension 11 and the distal attachment device 40 although these could be removed separately and then the external sleeve 30 removed later. This may have some advantage if  
 10 further surgical procedures are necessary as a clear way is provided to advance other surgical equipment.

FIGS 13A to FIG 13C shows the use of the introducer according to this invention with a self expanding bifurcated prosthesis

In FIGS 13A to FIG 13C the section of the introducer including the proximal attachment device and the distal attachment device of the introducer with a  
 15 bifurcated prosthesis is shown.

The bifurcated prosthesis 50 is retained within the external sheath 51 between the proximal attachment device 52 and the distal attachment device 53 with respective fixings to the proximal attachment device 52 and the distal  
 20 attachment device 53 of the same for as shown in Figs 1 to 12. The proximally extending zigzag stent 57 is retained within the proximal attachment device 52.

As shown in FIG 13B after the proximal trigger wire 61 has been released and the proximal attachment device 52 advanced the proximal end of 56 of  
 25 the prosthesis 50 is released and the zigzag stent 57 is free to expand. At this stage the distal end 58 of the prosthesis 50 is still retained in the distal attachment means 53.

At this stage an extension piece 59 can be inserted into the side arm 60 by a separate introducer from the other femoral artery as shown in Fig 13C. The  
 30 release of the distal attachment device and the withdrawal of the introducer can the proceed in the same manner as discussed with respect to Figs 1 to 12.

An embodiment of introducer according to this invention suitable for the introduction of an extension prosthesis is shown in FIG 14 which shows the various portions of the introducer along its length.

Commencing from the proximal end the embodiment includes a tapered  
 5 flexible extension 70 mounted on a thin walled metal tube 71. The tapered flexible extension 70 includes a longitudinal aperture 73. The thin walled metal tube 71 is fastened to the tapered flexible extension and extends in a distal direction from the tapered flexible extension to external of the patient in use. The thin walled metal tube 71 extends to a connector 74 for the  
 10 introduction of medical reagents as necessary. There are no proximal or distal attachment devices on the extension prosthesis introducer. The prosthesis 75 is retained between the distal end 80 of the flexible extension and the proximal end 78 of a thick walled flexible tube 77. A sheath 79 is a sliding fit on the thick walled tube 77 and during the insertion process is fitted  
 15 over the extension prosthesis up to the distal end 80 of the flexible extension 70 to provide a smooth surface for the progression of the introducer through the vasculature.

The method of introduction of the extension prosthesis is as follows.

A guide wire (not shown) is introduced into the femoral artery and advanced  
 20 until its tip is above the region into which the prosthesis is to be deployed. The introducer is then advanced over the guide wire with a oscillating rotating action until the extension prosthesis is overlapped one full stent within the shorter leg of the prosthesis. A final position check may than be made before the sheath 79 is withdrawn while holding the thick walled tube  
 25 77 in place. The introducer can then be removed by withdrawing the flexible extension 70 to the thick walled tube 77 and covering the gap between then with the sheath 79.

FIG 15 shows an embodiment of a bifurcated prosthesis with an extension prosthesis according to this invention. The bifurcated prosthesis 90 has a  
 30 generally inverted Y- shaped configuration having a body portion 91, a shorter leg 92 and a longer leg 93. The body of the prosthesis is constructed from a tubular woven synthetic material such as dacron. At the proximal end 94 of the prosthesis 90 is a first zigzag stent 95 which extends beyond the end of the prosthesis and has distally extending barbs 96. The prosthesis

has a number of zigzag stents mounted to it and extending along its length. The stent 97 nearest the proximal end 94 is inside the tubular material so that the outside presents a smooth surface which in use engages against the inner wall of the vessel into which it is deployed to provide a barrier to the flow of blood. The stent 98 nearest the distal end 99 of the longer leg is also inside the tubular material so that the outside presents a smooth surface which in use engages against the inner wall of the vessel into which it is deployed to provide a barrier to the flow of blood. Between these internal stents the rest of the stents 100 are arranged on the outside of the tubular material so that they present minimal restriction to the flow of blood through the prosthesis and present minimal sites for the growth of thromboses within the prosthesis. Each stent is sewn to the tubular material as shown particularly at 101.

The longer leg 93 has one loop 43 of the terminal internal stent 98 extending beyond the end of the tubular material to act as the distal attachment means.

In use the prosthesis according to this embodiment of the invention is adapted for fitting into aorta such that the end 94 is just distal of the renal arteries and the first zigzag stent 95 extend up to or over the renal arteries. As it is constructed from thin wire it does not obstruct the renal arteries if it extends over them. The longer leg 93 extends down one of the iliac arteries and the shorter leg terminates in the aorta just short of the other iliac artery.

The terminal stent 102 nearest the distal end 92 of the shorter leg is outside the tubular material so that the inside presents a smooth surface which in use engages against the outside of one end of an extension prosthesis.

An extension prosthesis 104 is adapted for fitting into the shorter leg by the method as discussed above. The extension prosthesis 104 is constructed from a tubular synthetic material such as dacron and has terminal internal stents 105 and a plurality of external intermediate stents 106.

FIG 16 shows an embodiment of a bifurcated prosthesis with two extension prostheses according to this invention. The bifurcated prosthesis 110 has a generally inverted Y- shaped configuration having a body portion 111, a shorter leg 112 and a longer leg 113. The body of the prosthesis is constructed from a tubular woven synthetic material such as dacron. At the

proximal end 114 of the prosthesis 110 is a first zigzag stent 115 which extends beyond the end of the prosthesis and has distally extending barbs 116. The prosthesis has a number of zigzag stents mounted to it and extending along its length. The stent 117 nearest the proximal end 114 is inside the tubular material so that the outside presents a smooth surface which in use engages against the inner wall of the vessel into which it is deployed to provide a barrier to the flow of blood. The terminal stents 118 nearest the distal end 99 of the both the shorter and longer legs are outside the tubular material so that the inside presents a smooth surface which in use engages against the outside of one end of an extension prosthesis. Between these terminal stents the rest of the stents 119 are arranged on the outside of the tubular material so that they present minimal restriction to the flow of blood through the prosthesis and present minimal sites for the growth of thromboses within the prosthesis.

The longer leg 113 has one loop 43 of the terminal external stent 118 extending beyond the end of the tubular material to act as the distal attachment means.

Extension prostheses 120 and 121 are adapted for fitting into both the shorter and longer legs by the method as discussed above. Each of the extension prostheses 120 and 121 are constructed from a tubular synthetic material such as dacron and have terminal internal stents 122 and a plurality of external intermediate stents 123.

In use the prosthesis according to this embodiment of the invention is adapted for fitting into aorta such that the end 114 is just distal of the renal arteries and the first zigzag stent 115 extend up to or over the renal arteries. As it is constructed from thin wire it does not obstruct the renal arteries if it extends over them. The longer leg 113 extends down one of the iliac arteries and the shorter leg terminates in the aorta just short of the other iliac artery. The extension prostheses when deployed extend down each iliac artery.

FIG 17 shows an embodiment of a prosthesis according to this invention intended for aortouni-iliac deployment. The prosthesis 130 has a generally tapering tubular configuration having a body portion 131 extending down to a single leg 132 of lesser diameter than the body portion. The body of the prosthesis is constructed from a tubular woven synthetic material such as

- dacron. At the proximal end 134 of the prosthesis 130 is a first zigzag stent 135 which extends beyond the end of the prosthesis and has distally extending barbs 136. The prosthesis has a number of zigzag stents mounted to it and extending along its length. The stent 137 nearest the proximal end 134 is inside the tubular material so that the outside presents a smooth surface which in use engages against the inner wall of the vessel into which it is deployed to provide a barrier to the flow of blood. The stent 138 nearest the distal end 132 of the leg is also inside the tubular material so that the outside presents a smooth surface which in use engages against the inner wall of the vessel into which it is deployed to provide a barrier to the flow of blood. Between these internal stents the rest of the stents 140 are arranged on the outside of the tubular material so that they present minimal restriction to the flow of blood through the prosthesis and present minimal sites for the growth of thromboses within the prosthesis.
- 5 The leg 132 has one loop 43 of the terminal external stent 138 extending beyond the end of the tubular material to act as the distal attachment means.

- In use the prosthesis according to this embodiment of the invention is adapted for fitting into aorta such that the end 134 is just distal of the renal arteries and the first zigzag stent 135 extends up to or over the renal arteries.
- 20 As it is constructed from thin wire it does not obstruct the renal arteries if it extends over them. The leg 132 extends down one of the iliac arteries. The other iliac artery is intended to be closed off with a plug inserted via the femoral artery and a cross graft is surgically inserted between the iliac arteries to provide blood flow to both iliac arteries.
- 25 FIG 18 shows a deployed prosthesis according to the embodiment this invention within an aorta with an aneurism.

- The aneurism 150 is a ballooning of the aorta 152 between the renal arteries 153 and the iliac arteries 154. The prosthesis as shown in FIG 15 is deployed into the aorta so that it spans the aneurism allows blood flow from the aorta to the two iliac arteries. It will be noted that the proximal portion 94 of the prosthesis 90 which has the stent on the inside bears against the wall of the aorta 152 above the aneurism so that a good seal is obtained. The zigzag stent 95 which extends beyond the portion 94 extends over the entrances to the renal arteries but as the wire of the stent is fine occlusion
- 30



does not occur. The distal end of the prosthesis 99 seals against the wall of one of the iliac arteries and the distal end 155 of the extension prosthesis 104 bears against the wall of the other iliac artery.

- 5 The join 156 between the prosthesis 90 and the extension prosthesis 104 seals because there is a smooth connection between the smooth inner surface on the shorter leg 112 and the smooth outer surface of the proximal end of the extension prosthesis 104.

- 10 The size of the prostheses according to this invention may be selected so that there is in effect an interference fit in the sound parts of the vessels to give good sealing onto the inner walls of the vessels. The prosthesis at its widest may range in diameter from 20 mm to 32 mm where it fits into the aorta and from 8 mm to 24 mm where it fits into the iliac arteries.

- 15 The embodiment shown in FIG 15 may have an overall length of from 120 mm to 180 mm not counting the length of the uncovered proximal stent and the extension prosthesis may have a length of from 35 mm to 125 mm and a diameter of from 8 mm to 24 mm. The amount of overlap between the shorter leg of the prosthesis and the proximal end of the extension prosthesis is from 15 mm to 21 mm.

- 20 The embodiment shown in FIG 16 may have an overall length of from 100 mm to 130 mm not counting the length of the uncovered proximal stent. The difference in length between the shorter and longer legs of the bifurcated prosthesis may be 30 mm. The shorter extension prosthesis may have a length of from 65 mm to 125 mm and a diameter of from 8 mm to 24 mm. The amount of overlap between the shorter leg of the prosthesis and the proximal end of the longer extension prosthesis is from 15 mm to 22 mm. The longer extension prosthesis may have a length of from 35 mm to 125 mm and a diameter of from 8 mm to 24 mm. The amount of overlap between the longer leg of the prosthesis and the proximal end of the shorter extension prosthesis is from 15 mm to 22 mm.

- 30 The embodiment shown in FIG 17 may have an overall length of from 90 mm to 180 mm not counting the length of the uncovered proximal stent. The prosthesis at its widest may range in diameter from 20 mm to 32 mm where it fits into the aorta and from 8 mm to 24 mm where it fits into one of the iliac

arteries

Throughout this specification unless the context requires otherwise, the words 'comprise' and 'include' and variations such as 'comprising' and 'including' will be understood to imply the inclusion of a stated integer or  
5 group of integers but not the exclusion of any other integer or group of integers.

Throughout this specification various indications have been given as to the scope of this invention but the invention is not limited to any one of these but may reside in two or more of these combined together. The examples are  
10 given for illustration only and not for limitation.

## CLAIMS

1. An introducer for positioning an expandable endovascular prosthesis {20} in a lumen of a patient, the prosthesis having a proximal portion and a distal portion, the introducer comprising; a prosthesis positioning mechanism (2, 3) selectively releasable from the prosthesis when the prosthesis is positioned at a desired site in the lumen of a patient; a first control member (22, 24) controlling at least the longitudinal position of the proximal portion of the prosthesis; and a second control member (44, 25) controlling at least the longitudinal position of the distal portion of the prosthesis.
2. The introducer according to claim 1, wherein said prosthesis positioning mechanism includes a distal attachment region (2) and/or a proximal attachment region (3).
3. The introducer according to claim 2, wherein said distal attachment region includes a distal attachment device (10).
4. The introducer according to claim 2 or 3, wherein said proximal attachment region includes a proximal attachment device (10).
5. The introducer according to any one of claims 1 through 4, wherein the prosthesis positioning mechanism comprises a control arrangement. (15, 41) for controlling the length of the prosthesis.
6. The introducer according to any one of claims 1 through 4, wherein the prosthesis positioning mechanism comprises a rotational arrangement (15, 41) by which the relative angular orientation of the proximal and distal portions of the prosthesis can be adjusted.
7. The introducer according to any one of claims 1 through 4, wherein the prosthesis positioning mechanism comprises a rotational arrangement (15, 41) by which the angular orientation of the prosthesis can be adjusted.
8. The introducer according to any one of claims 1 through 7, wherein the introducer further comprises an expansion control mechanism (10, 30) controlling expansion of the prosthesis when the prosthesis is positioned at

the desired site in the lumen of the patient.

9. An endovascular arrangement for positioning an expandable prosthesis at a desired location in a lumen of a patient, said arrangement comprising a control section (1) to be maintained external to the patient, and  
5 a prosthesis positioning mechanism (2, 3) controllable by the control section for moving and manipulating the prosthesis to a desired location in the lumen, wherein a first member (15) extends from the control section to a proximal region (3) of the positioning mechanism, the proximal region of the positioning mechanism having means (10) for controlling the proximal end of  
10 the prosthesis, wherein a second member (41) extends from the control section to a distal region (2) of the positioning mechanism, the distal region having means (40) for controlling the distal end of the prosthesis in cooperation with the second member.
10. The endovascular arrangement according to claim 9, wherein the  
15 arrangement further comprises contraction means for containing self expanding stents of the prosthesis during insertion of the prosthesis positioning mechanism into the lumen and/or expansion means for expanding expandable stents of the prosthesis when the prosthesis is positioned at the desired site in the lumen of the patient.
11. The arrangement according to claim 10, wherein the contraction means  
20 includes tubular means (30) that extends from the control section to the positioning mechanism and serves to contain the prosthesis during insertion of the positioning mechanism into the lumen and to control the distal end of the prosthesis when the tubular means has been moved in a distal direction  
25 relative to the first and second members, relative movement between the first and second members enabling manipulation of the prosthesis when in the lumen.
12. The arrangement according to claim 10 or 11, wherein the  
30 expansion means includes at least radial means for radially expandable stents of the prosthesis when the prosthesis is positioned at the desired location in the lumen.
13. The arrangement according to claim 12, wherein the expansion means includes an inflatable balloon.

14. The arrangement according to claim 12, wherein the first and second members are contained within the said tubular means.
15. The arrangement according to claim 12 or 14, wherein means (39) are provided for clamping the first and second members together during  
5 insertion of the prosthesis and for releasing the first and second members prior to the manipulation.
16. The arrangement according to claims 12, 14, or 15 wherein expansion of a non self expanding prosthesis can be performed by expansion of a balloon located around the first member and within the  
10 prosthesis, said balloon being inflatable from the control section.
17. The arrangement according to claim 12, 14, 15, or 16, wherein the said proximal region of the attachment mechanism contains tubular means (10) for containing the proximal end of the prosthesis prior to final positioning thereof, and wherein release of the prosthesis from tubular means (10) is  
15 achieved by proximal movement of the first member.
18. The arrangement according to any one of claims 9 through 17, wherein the second member has means (40) for controlling the distal end of the stent whilst the latter is inside the tubular means (30).
19. The arrangement according to any one of claims 9 through 18,  
20 wherein the arrangement further comprises release mechanisms (24, 25) in the control section for controlling wires (22, 44) extending to respective stents of the prosthesis.
20. The arrangement according to any one of the claims 9 through 19, wherein the prosthesis positioning mechanism comprises a control  
25 arrangement (15, 41) for controlling the length of the prosthesis.
21. The arrangement according to any one of claims 9 through 19, wherein the prosthesis positioning mechanism comprises a rotational arrangement (15, 41) by which the relative angular orientation of the proximal and distal portions of the prosthesis can be adjusted.
- 30 22. The arrangement according to any one of claims 9 through 19,

wherein the prosthesis positioning mechanism comprises a rotational arrangement (15, 41) by which the angular orientation of the prosthesis can be adjusted.

23. The arrangement according to any one of claims 9 through 19,  
5 wherein the introducer further comprises an expansion control mechanism (10, 30) for controlling expansion of the prosthesis when the prosthesis is positioned at the desired site in the lumen of the patient.

24. An introducer adapted for the introduction of a self expanding  
10 endovascular prosthesis into a lumen of a patient, the prosthesis having a proximal end and a distal end, the introducer comprising,  
a. a proximal attachment device adapted to be attached to the proximal end of the prosthesis,  
b. distal attachment device adapted to be attached to the distal end  
of the prosthesis,  
15 c. each of the proximal and distal attachment devices attaching to the prosthesis in such a manner that the prosthesis can be held in tension therebetween and that each end of the prosthesis can individually be moved in proximal and distal directions and be rotated, and  
d. proximal releasing means associated with the proximal  
20 attachment device and distal releasing means associated with the distal attachment device to enable selective releasing of the proximal and distal ends of the prosthesis.

25. An introducer as in claim 24 wherein the proximal attachment  
25 means has a long flexible extension on its proximal end to facilitate insertion of the introducer into a body lumen and its advancement along the lumen.

26. An introducer as in claim 25 wherein the proximal attachment device  
is mounted on a flexible thin walled tube which extends in a distal direction from the proximal attachment device to an external manipulation section of the introducer which is adapted to remain external of the patient.

30 27. An introducer as in claim 26 wherein the thin wall metal tube includes fluid connection means external of the patient to enable the introduction of a medical reagent therethrough.

28. An introducer as in claim 27 wherein the long flexible extension includes a hollow tube therethrough in fluid communication with the thin wall metal tube and a plurality of side holes to enable dispersion of the medical reagent proximal of the prosthesis.
- 5 29. An introducer as in claim 26 wherein the distal attachment device is mounted on a flexible thick walled tubing and coaxial on the thin walled tube and extending in a distal direction to the external manipulation section and mounted such that the respective tubes can be moved together or independently.
- 10 30. An introducer as in claim 29 including a haemostatic seal between the thin walled tube and the thick walled tube in the manipulation section.
31. An introducer as in claim 30 including means to introduce a medical reagent into an annular space defined between the thin walled tube and the thick walled tube.
- 15 32. An introducer as in claim 24 including a proximal trigger wire extending from the proximally attachment device to the manipulation section, the proximal trigger wire being adapted to activate the proximal releasing means.
33. An introducer as in claim 24 including a distal trigger wire extending from the distal attachment device to the manipulation section, the distal trigger wire being adapted to activate the distal releasing means.
- 20 34. An introducer as in claim 24 including an external release mechanism for each of the proximal trigger wire and distal trigger wire, the external release mechanism adapted to prevent accidental release of the trigger wires and to allow release of the distal releasing means only after release of the proximal releasing means.
- 25 35. An introducer as in claim 34 including a haemostatic seal around the respective trigger wires in the manipulation section.
- 30 36. An introducer as in claim 24 including an external sheath extending from external of the patient to cover and compress the prosthesis during

insertion of the introducer into a patient and movable longitudinally from outside the patient to expose the prosthesis.

37. An introducer as in claim 36 wherein the external sheath is coaxial with and a sliding fit on the thick walled tube.

5 38. An introducer as in claim 37 wherein the external sheath has a proximal end which is tapered and smoothed to present a low resistance to advancement of the introducer during insertion.

10 39. An introducer as in claim 36 wherein the proximal end of the external sheath is adapted to have a tight fit on to the proximal attachment device.

40. An introducer as in claim 24 wherein the distal attachment device is of a streamlined shape and is adapted to be advanced to the proximal attachment device whereby to allow smooth retrieval through the released prosthesis and into the external sheath for removal from a patient.

15 41. An introducer as in claim 24 wherein the prosthesis is a bifurcated prosthesis.

42. An introducer as in any one previous claim wherein the lumen of the patient is an aorta and the prosthesis is adapted to repair an aortic aneurism.

20 43. A method of placing a prosthesis into an internal lumen by means of an insertion assembly the method including the steps of:

a. inserting the insertion assembly including the prosthesis into the internal lumen,

b. withdrawing a sheath from the insertion assembly to expose the prosthesis,

25 c. releasing the prosthesis from the insertion assembly,

d. replacing the sheath onto the insertion assembly, and

e. retracting the insertion assembly.

30 44. A method as in claim 43 wherein the prosthesis has a proximal end and a distal end and the insertion assembly includes a proximal attachment device and a distal attachment device adapted to retain the proximal and



distal ends of the prosthesis respectively and the step of releasing the prosthesis includes the steps of releasing the proximal end and then the distal end.

5 45. A method as in claim 44 wherein the step of replacing the sheath onto the insertion assembly includes the step of advancing the distal attachment device up to the proximal attachment device and withdrawing the two devices together.

10 46. A method as in claim 44 wherein between steps (b) and (c) the prosthesis is manipulated by respective movements of the proximal attachment device and distal attachment device to correctly position the prosthesis.

15 47. A method as in claim 43 wherein the prosthesis is a bifurcated prosthesis and the step of withdrawing the sheath includes the steps of withdrawing the sheath to a first position in which a side arm of the prosthesis is exposed, insertion of an extension prosthesis into the side arm and then full removal of the sheath from the prosthesis.

48. A method as in claim 47 wherein the step of insertion of the extension prosthesis into the side arm comprises the steps of;

20 (f) inserting an extension insertion assembly into the side arm, the extension insertion assembly including a top guide mounted on a catheter, an extension prosthesis on the catheter and a sheath retaining the extension prosthesis and extending over the top guide,

(g) withdrawing the sheath to expose and deploy the extension prosthesis,

25 (h) withdrawing the sheath, top guide and catheter together.

49. A method as in claim 48 wherein the top guide includes a long proximal nose extension.

50. A method as in claim 48 wherein the catheter includes a distal stop and the extension prosthesis is mounted between the distal stop and the top

guide.

51. A method as in claim 43 wherein the prosthesis is a bifurcated prosthesis and the step of withdrawing the sheath includes the steps of withdrawing the sheath to a first position in which a first side arm of the prosthesis is exposed, insertion of a first extension prosthesis into the first side arm, then full removal of the sheath from the prosthesis to expose a second side arm and then insertion of a second extension prosthesis into the second side arm.

52. A method as in claim 51 wherein the step of insertion of the first extension prosthesis into the side arm comprises the steps of;

(f) inserting a first extension insertion assembly into the first side arm, the first extension insertion assembly including a top guide mounted on a catheter, an extension prosthesis on the catheter and a sheath retaining the extension prosthesis and extending over the top guide,

(g) withdrawing the sheath to expose and deploy the extension prosthesis,

(h) withdrawing the sheath, top guide and catheter together

and the step of insertion of the second extension arm includes the steps of ;s

(i) inserting a second extension insertion assembly into the second side arm, the second extension insertion assembly including a top guide mounted on a catheter, an extension prosthesis on the catheter and a sheath retaining the extension prosthesis and extending over the top guide,

(j) withdrawing the sheath to expose and deploy the extension prosthesis,

(k) withdrawing the sheath, top guide and catheter together..

53. A method as in claim 52 wherein each of the top guides includes a long proximal nose extension.


- 54 A method as in claim 52 wherein each of the catheters includes a distal stop and the extension prostheses are mounted between the distal stop and the top guide.
55. An intraluminal prosthesis having a tubular graft and a plurality of self expanding stents along the length of the graft the prosthesis having a proximal end and a distal end, the prosthesis being characterised by the stents at the proximal end and at the distal end being inside the tubular graft and the remainder of the stents being on the outside of the graft.
56. An intraluminal prosthesis as in claim 55 further including a further self expanding stent mounted to the proximal end of the graft and extending beyond the said proximal end.
57. An intraluminal prosthesis as in claim 56 when the further stent includes attachment devices.
58. An intraluminal prosthesis as in claim 57 wherein attachment devices comprise barbs extending towards the distal end of the prosthesis.
59. An intraluminal prosthesis as in claim 55 wherein the prosthesis is bifurcated at its distal end to provide a shorter prosthesis leg and a longer prosthesis leg.
60. An intraluminal prosthesis as in claim 55 wherein the shorter leg has a terminal stent on the outside of the prosthesis and the longer leg has the internal distal stent.
61. An intraluminal prosthesis as in claim 59 or 60 further including an extension prosthesis for insertion into the shorter prosthesis leg, the extension prosthesis comprising a tubular extension prosthesis and a plurality of self expanding stents, the extension prosthesis having a proximal end and a distal end, stents at the proximal and distal ends being inside the tubular extension prosthesis and the remaining stents being on the outside of the prosthesis.
62. An intraluminal prosthesis as in claim 56 wherein both the shorter leg and longer leg have external terminal stents and extension prostheses for


63. An intraluminal prosthesis as in claim 55 wherein each stent is a zig-zag stent.

Abstract of the Disclosure

An introducer (1) adapted for the introduction of a self-expanding endovascular prosthesis (20) in a lumen of a patient. The introducer has attachment devices (10,30) to hold each end of the prosthesis so that each  
5 can be moved independently. An end ovascular prosthestis (20) is also claimed with stents at the proximal and distal ends being within the graft. The remainder of the stents are positioned on the outside of the graft body.

10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206

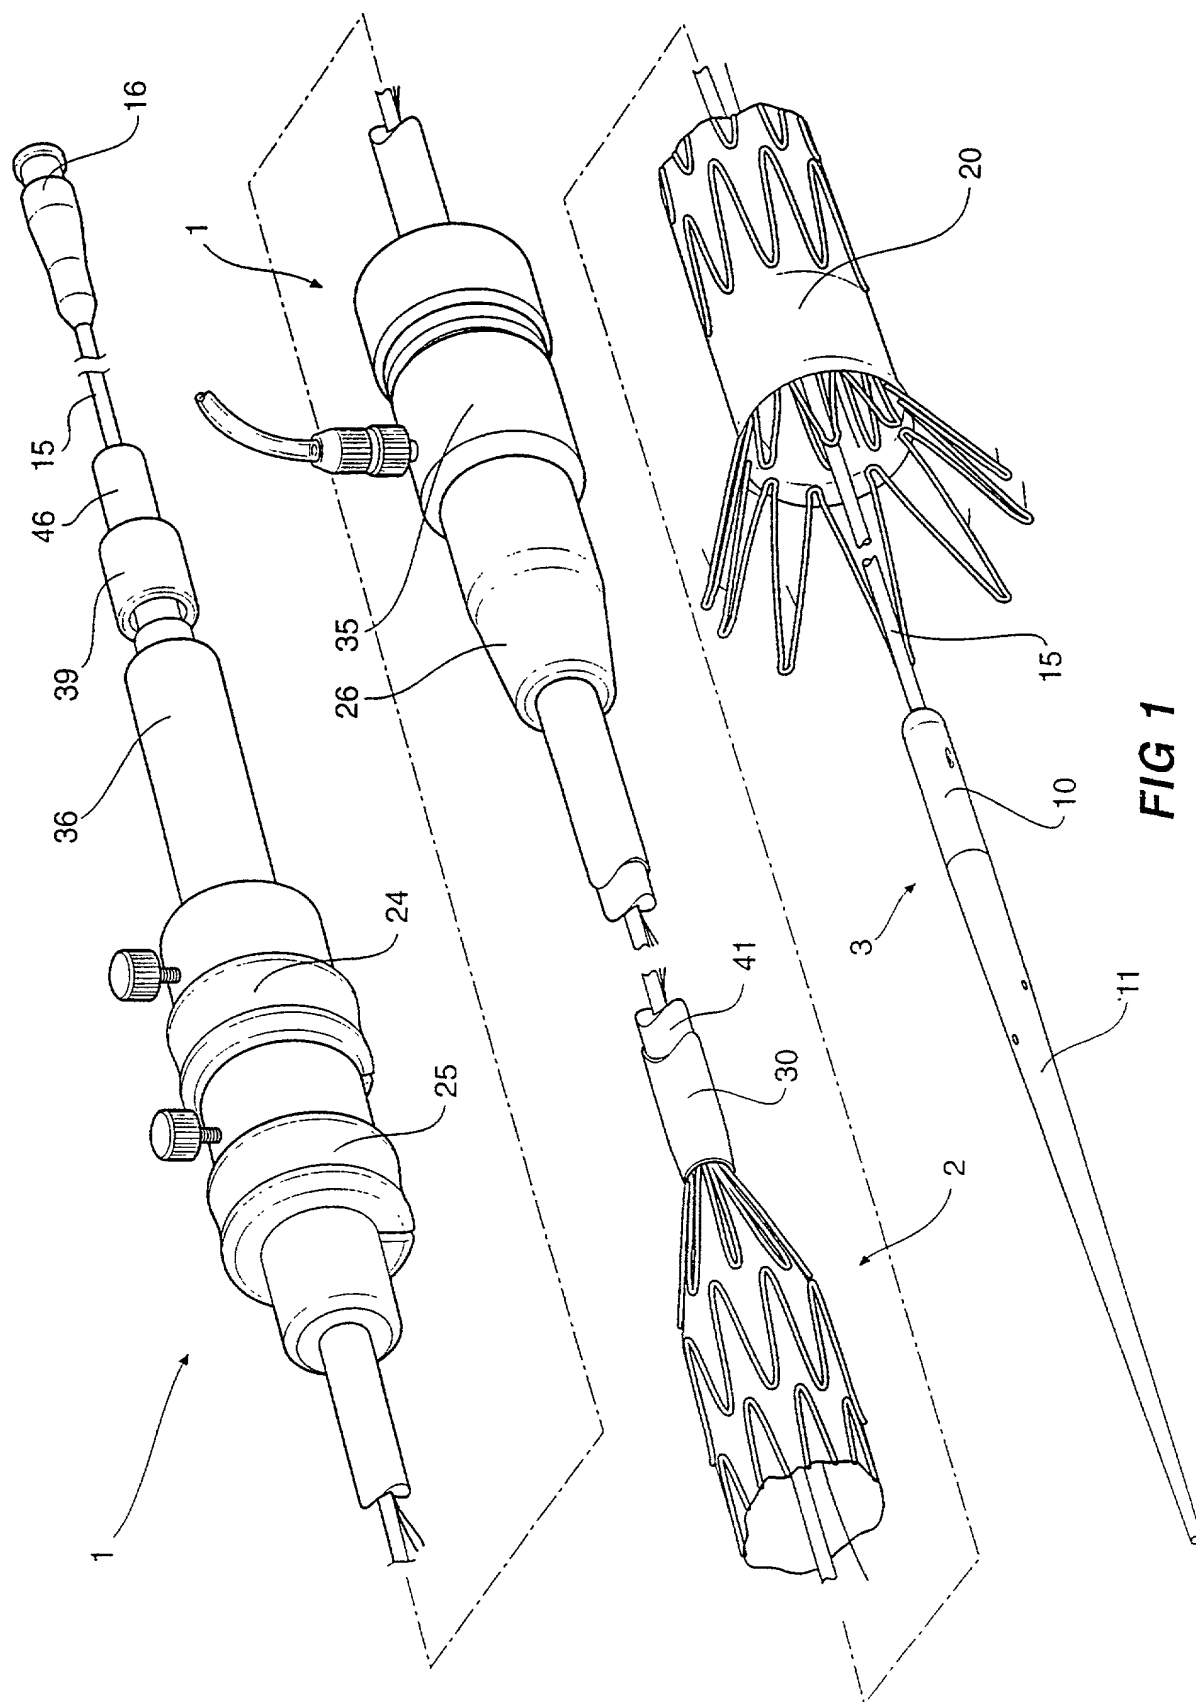

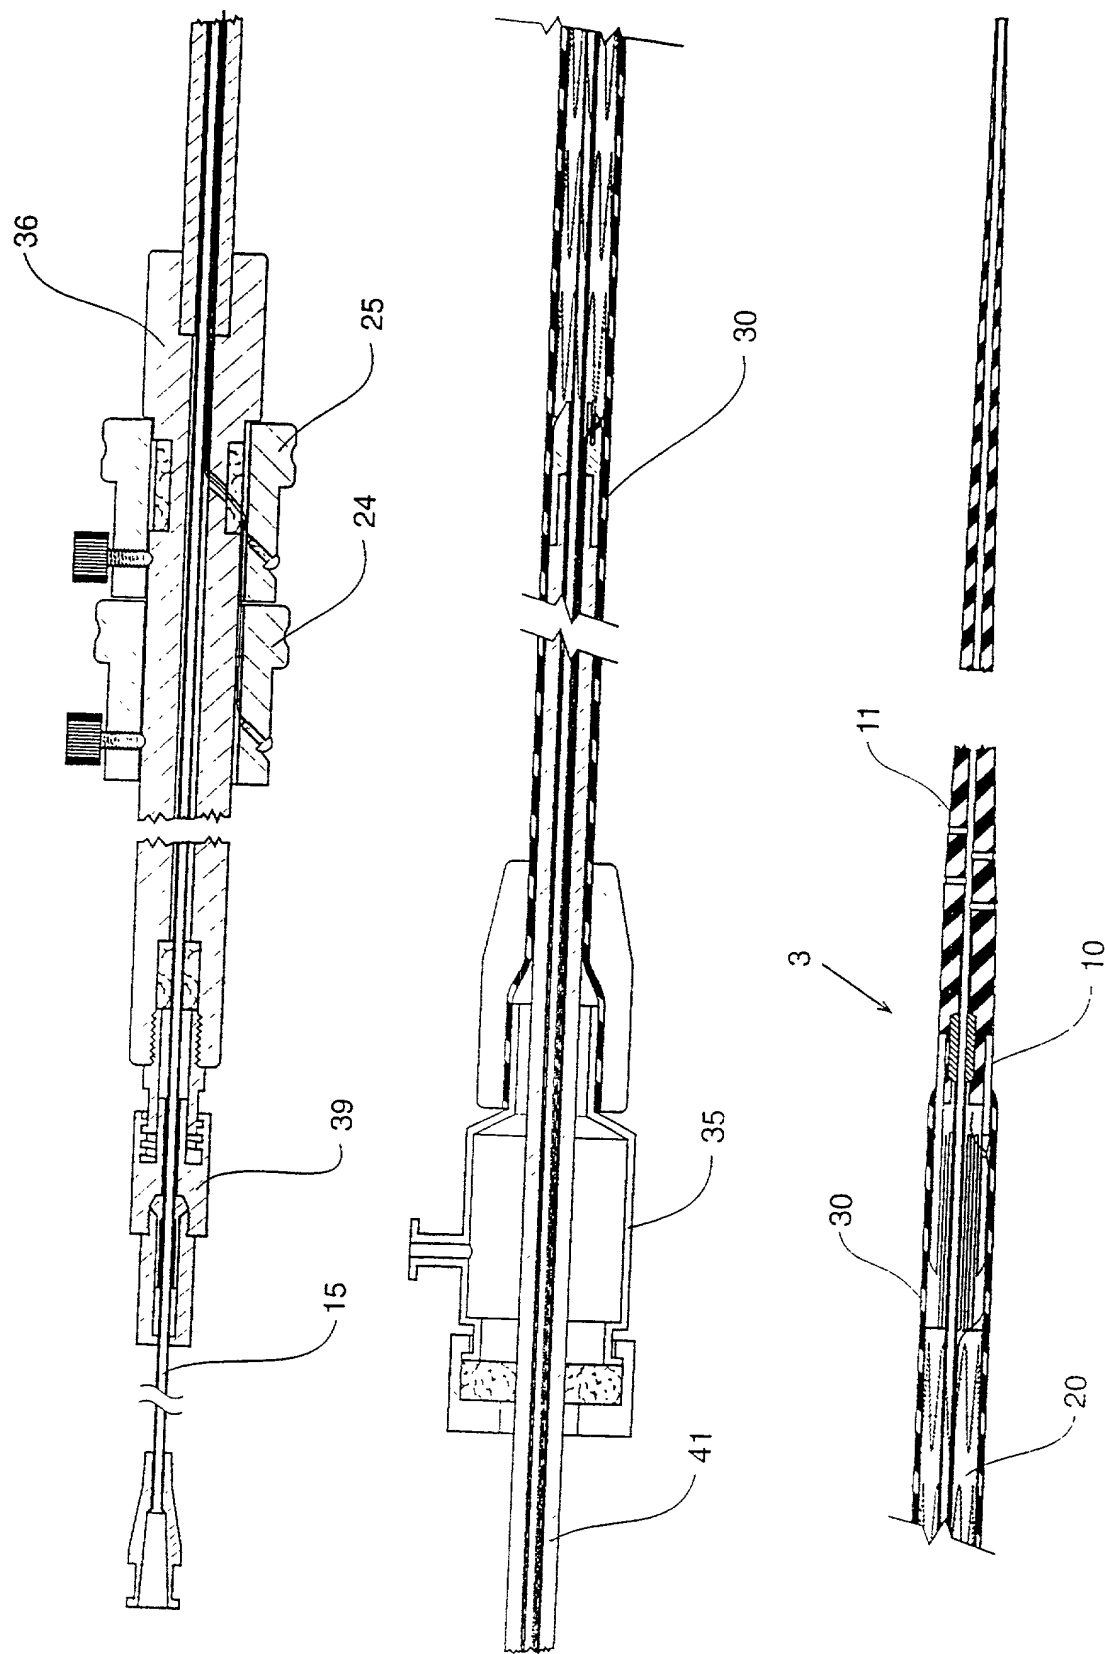

**FIG 2**

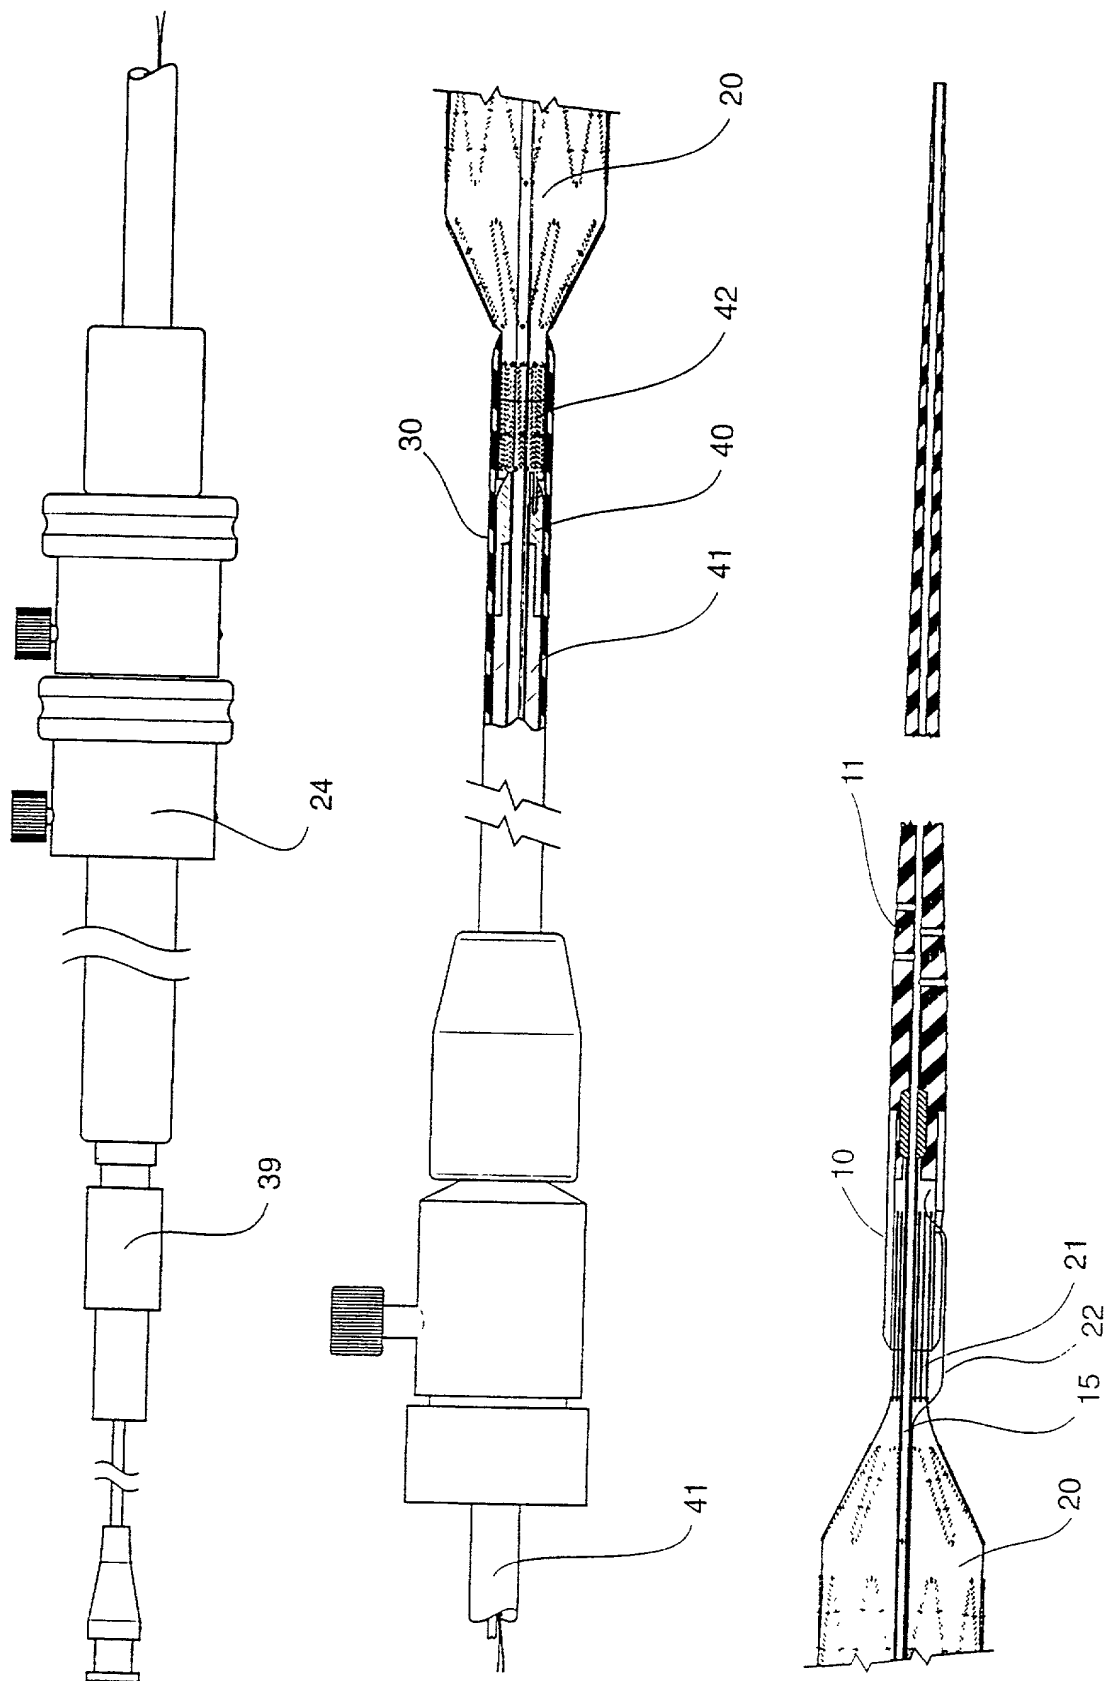


FIG. 3





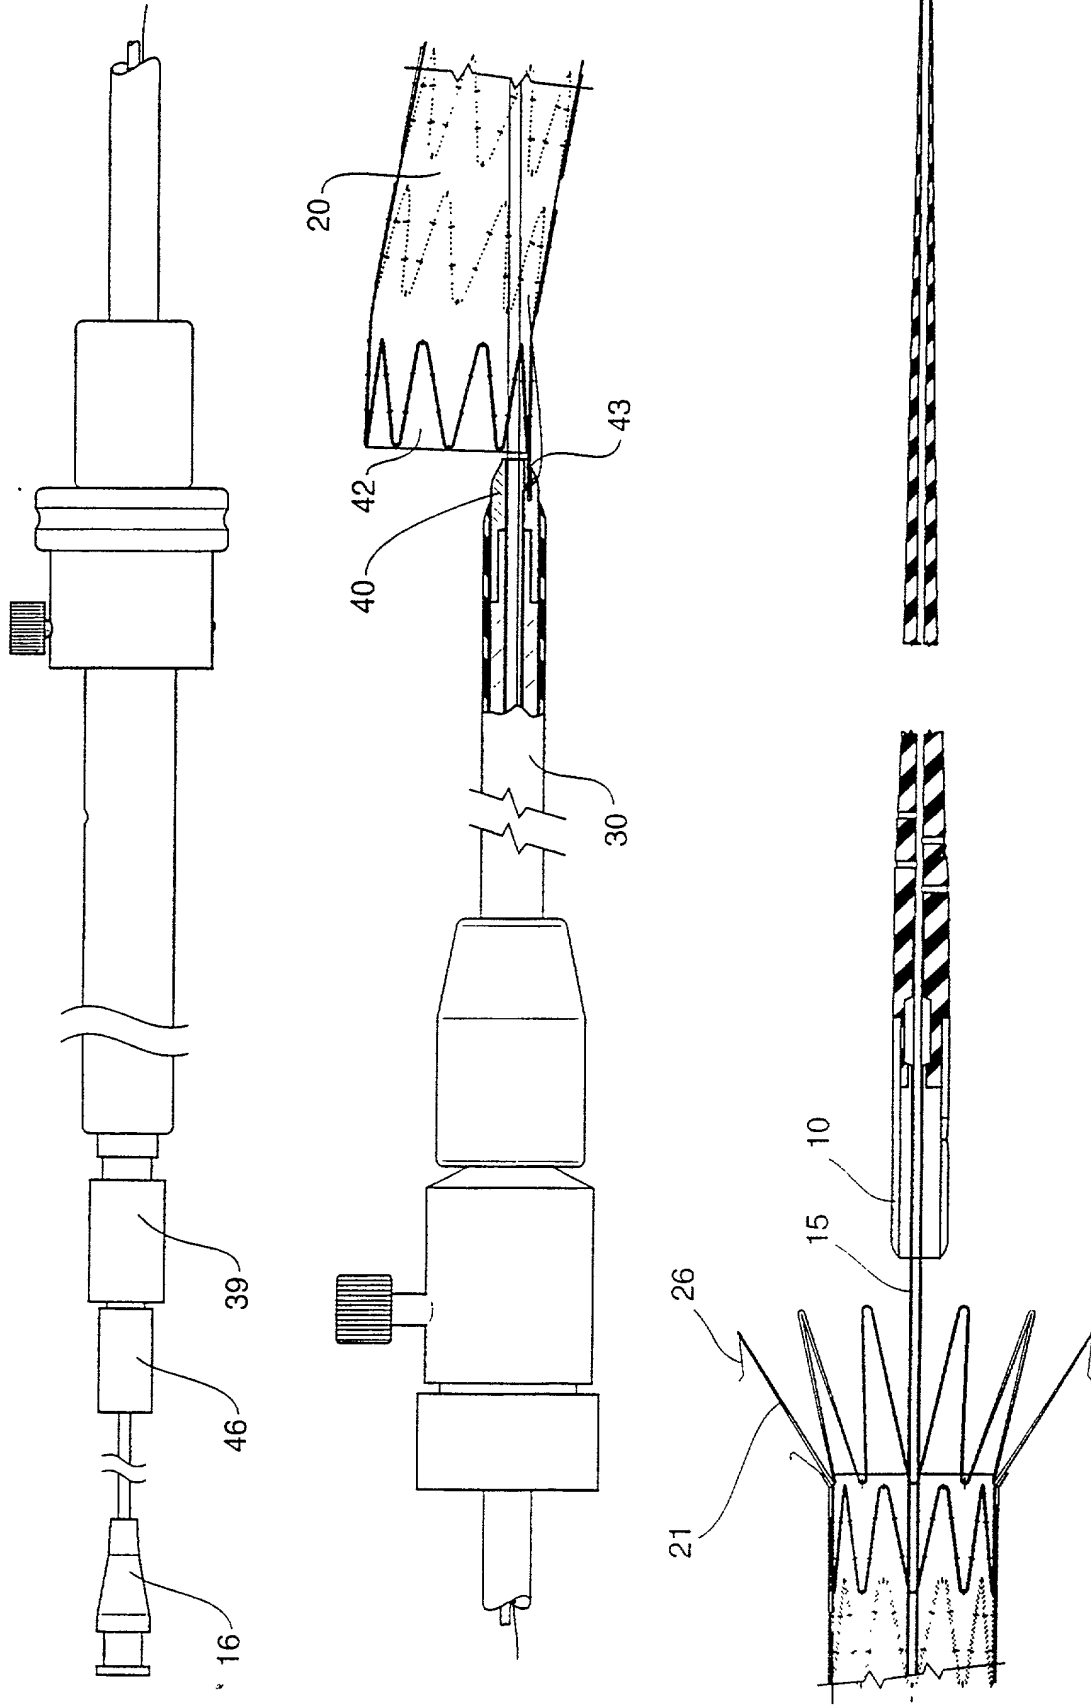


FIG 4

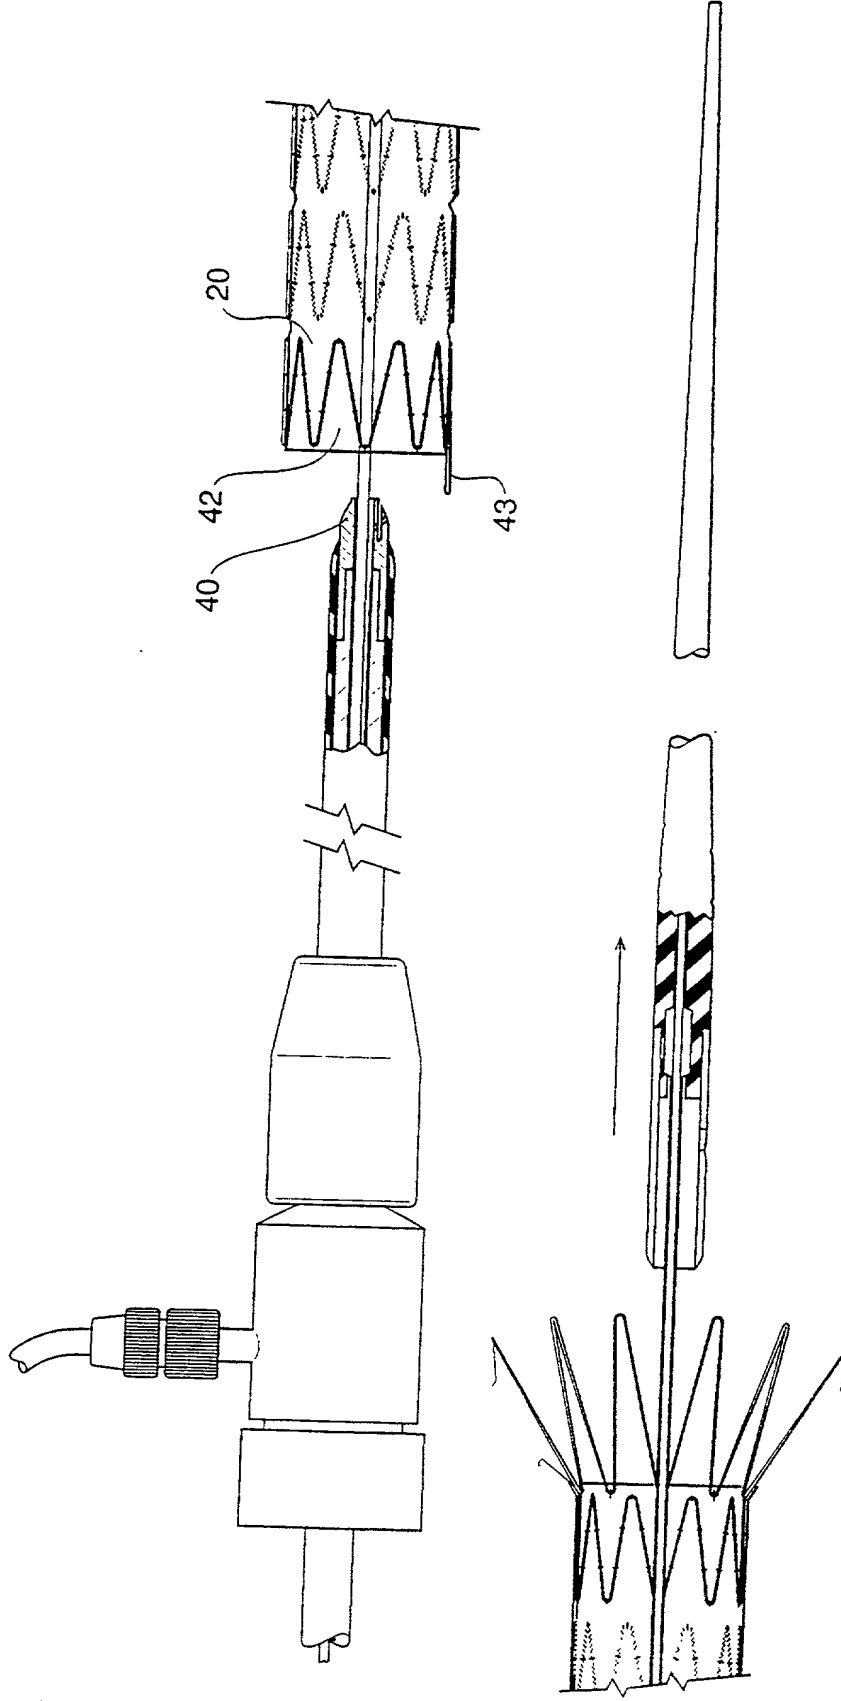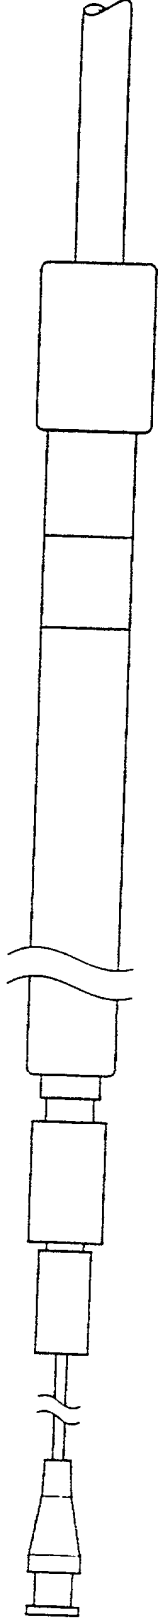

**FIG 5**

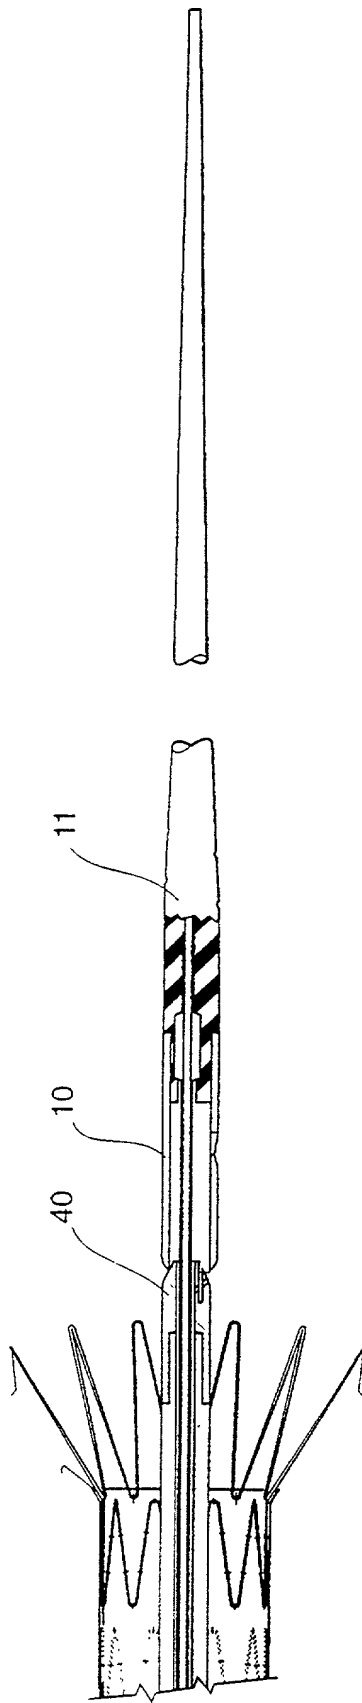
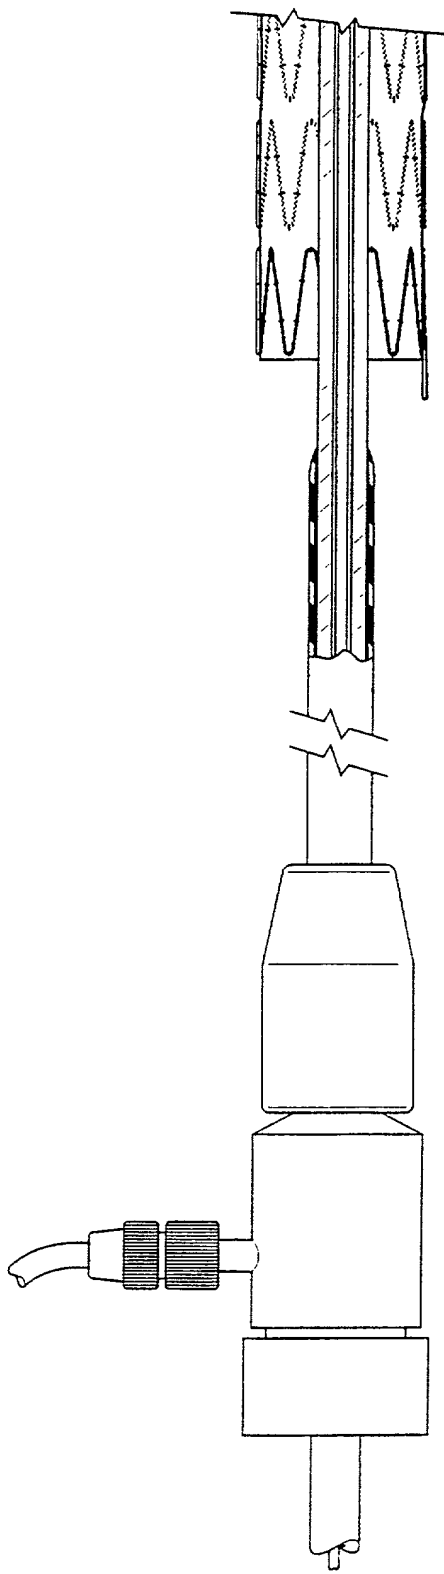



FIG 6





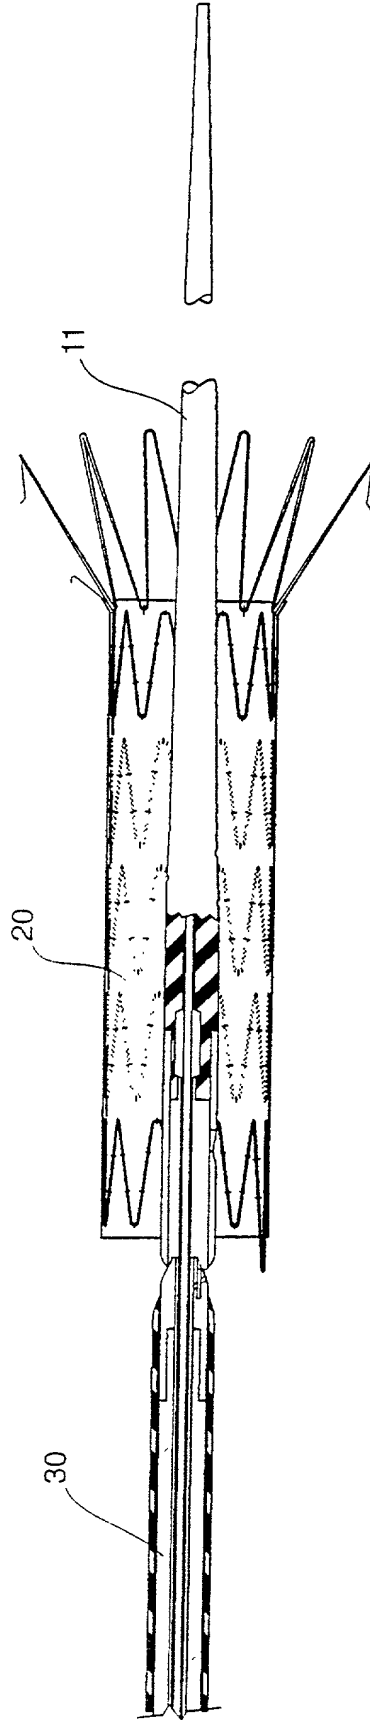


FIG 7

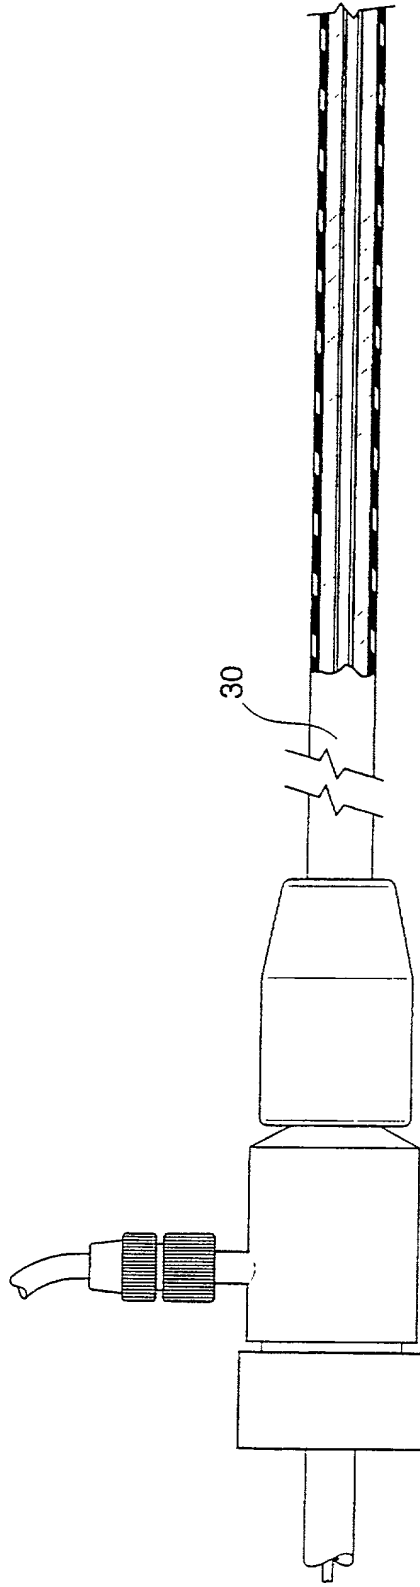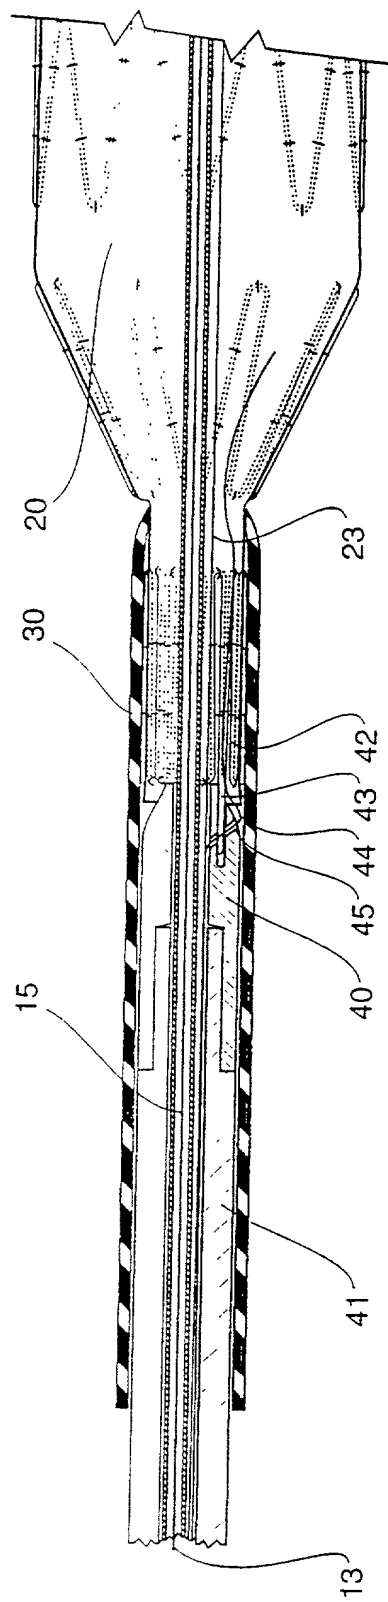

**FIG 8**

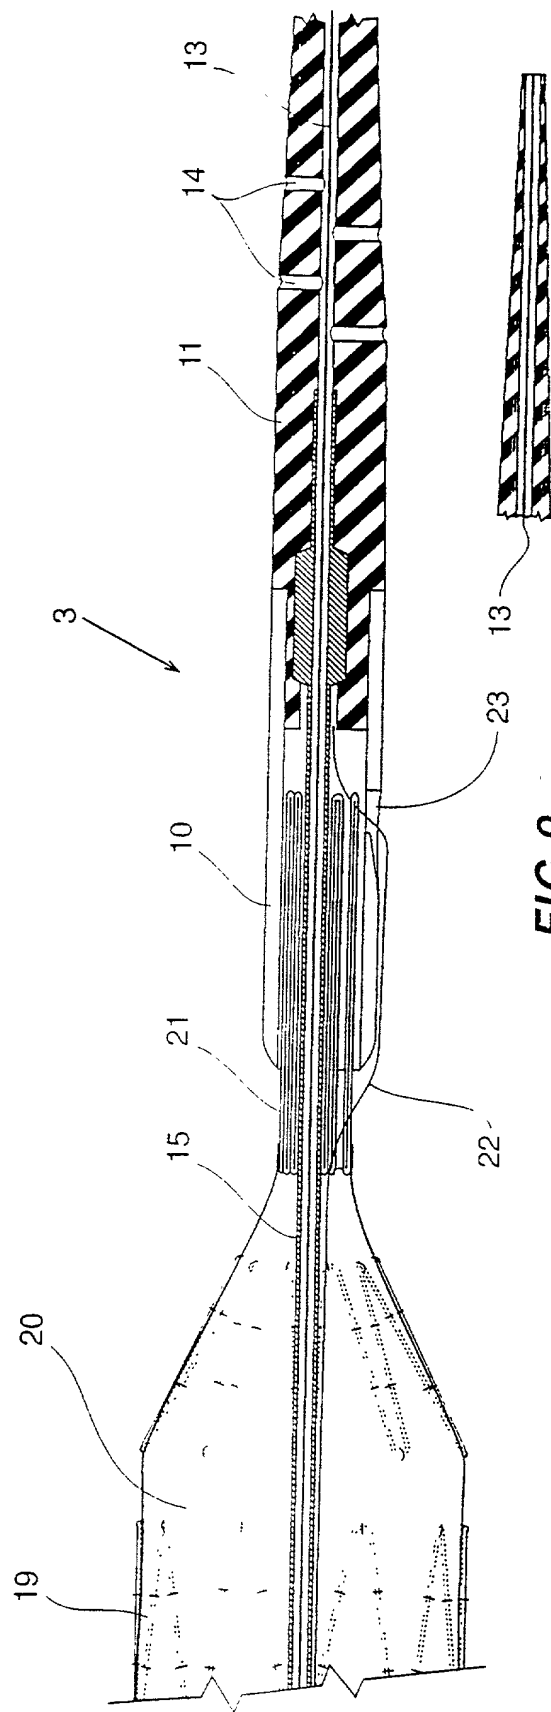

**FIG 9**

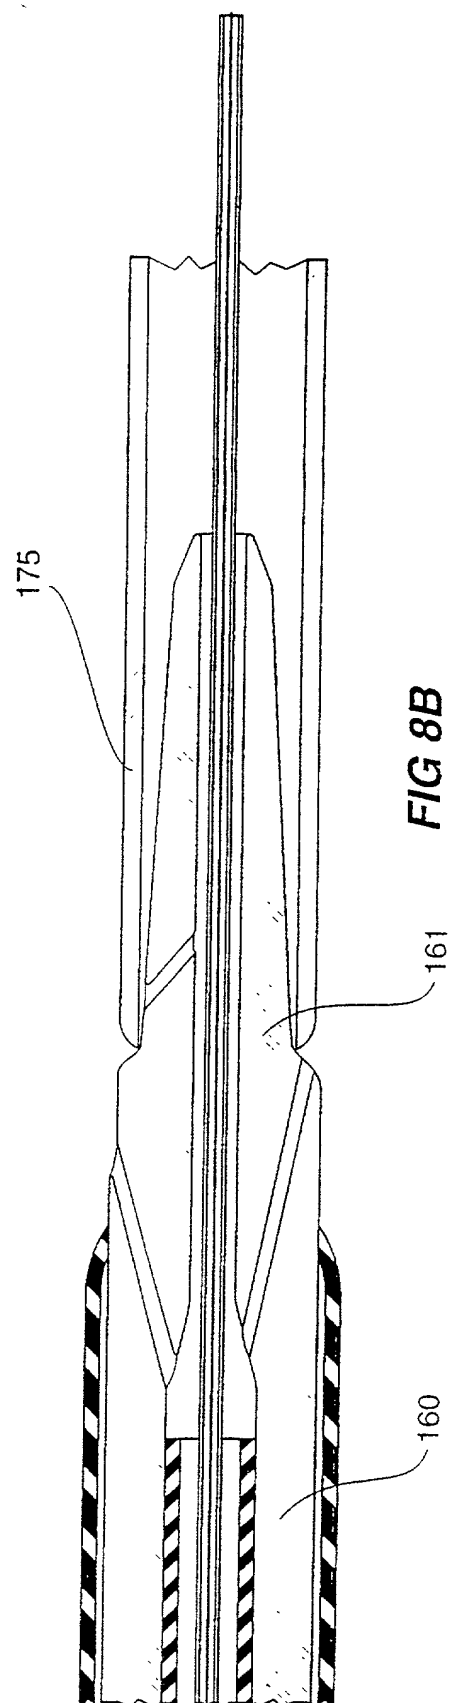
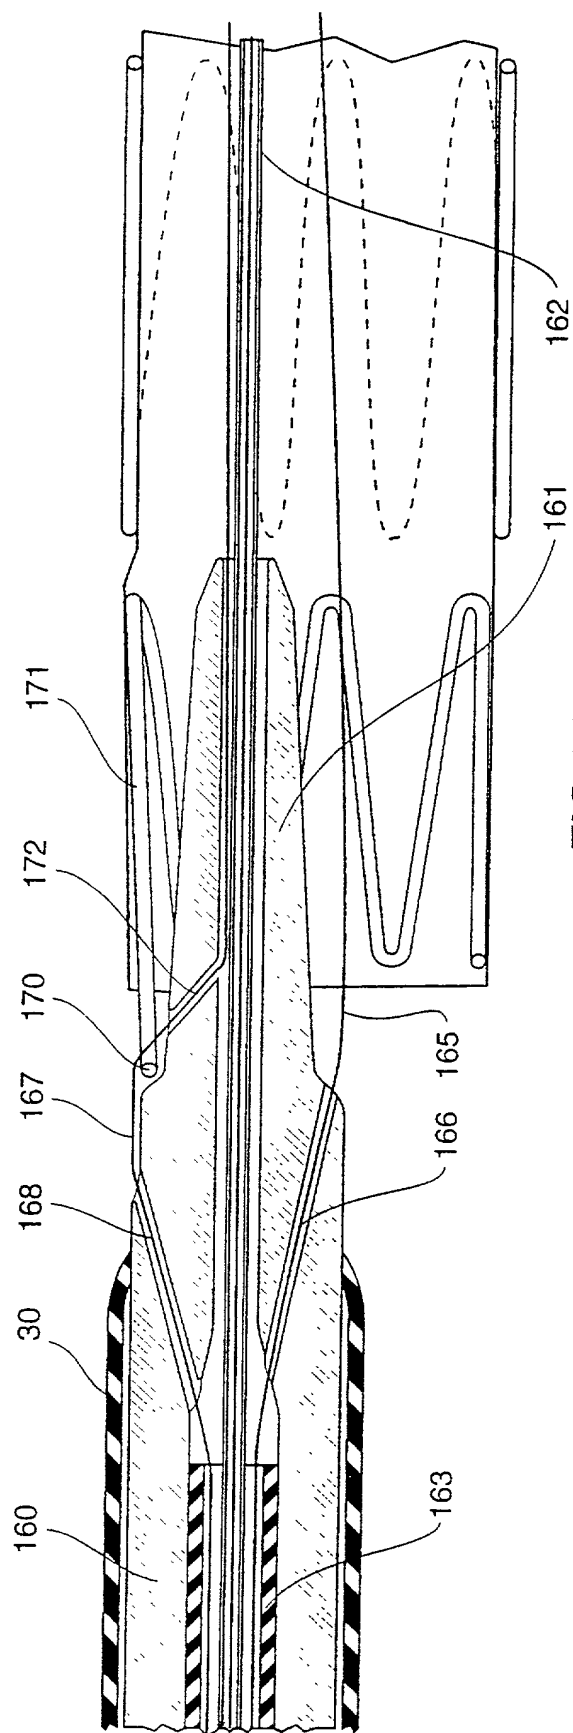


FIG. 10 is a cross-sectional view of the device 100 in a closed position, showing the handle 29, the trigger 26, the spring 35, the piston 28, the cylinder 27, the chamber 41, and the nozzle 30.


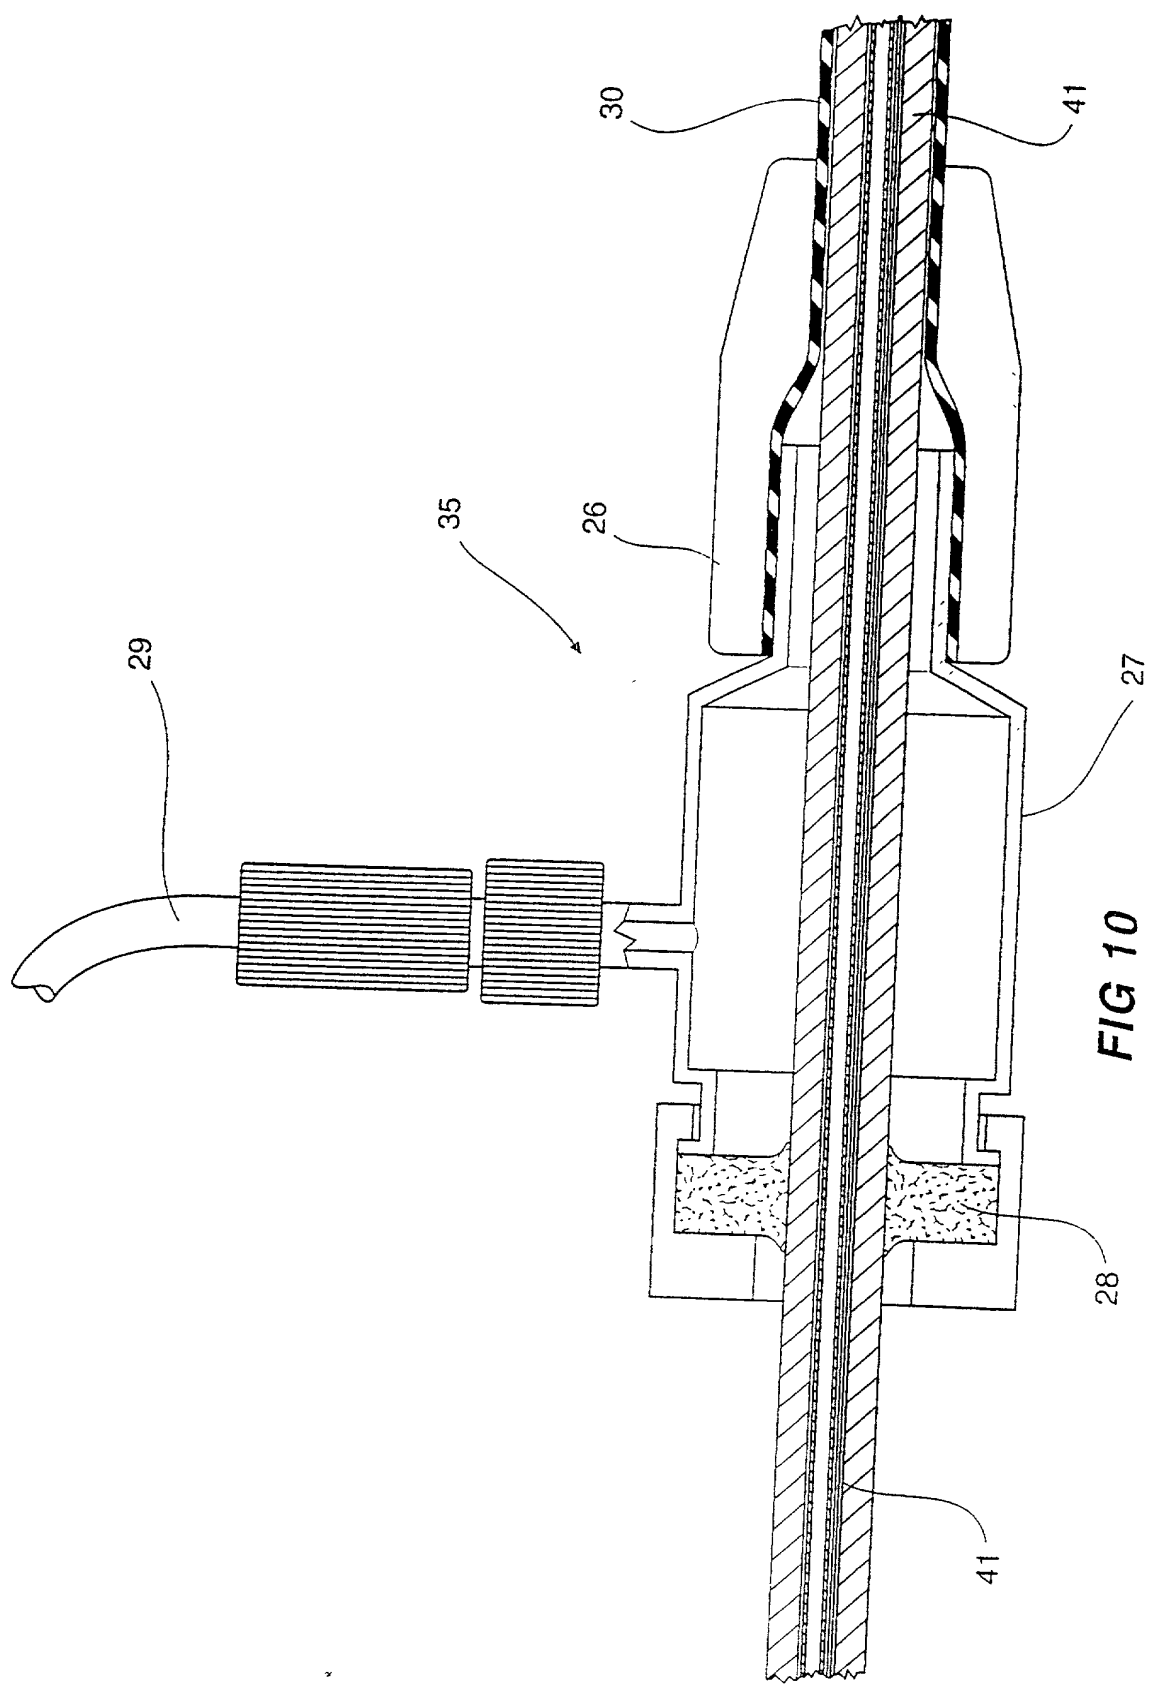



FIG 10




**FIG 11**



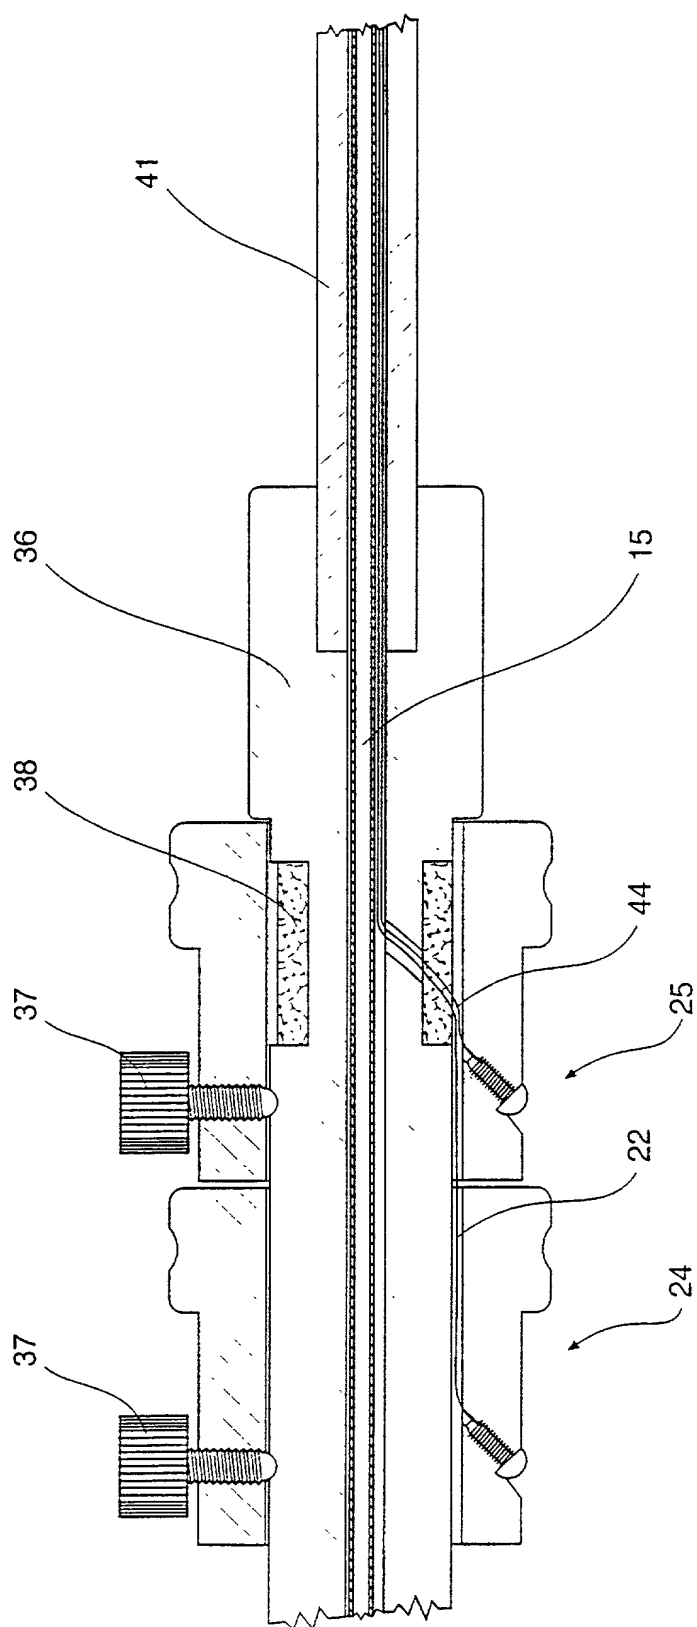

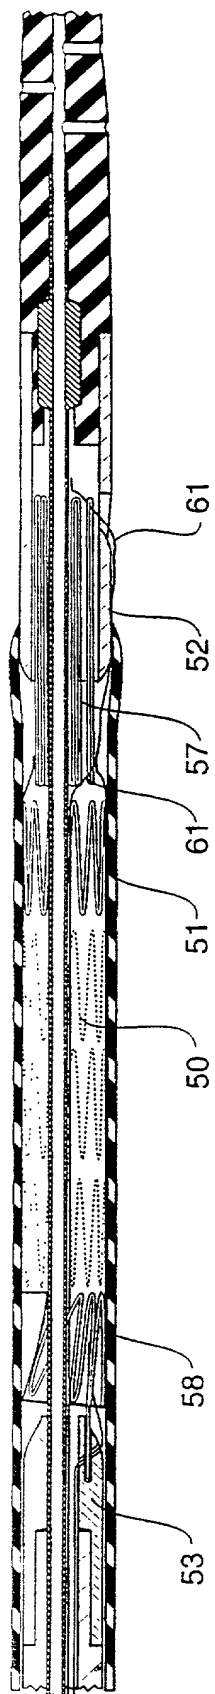

**FIG 13A**

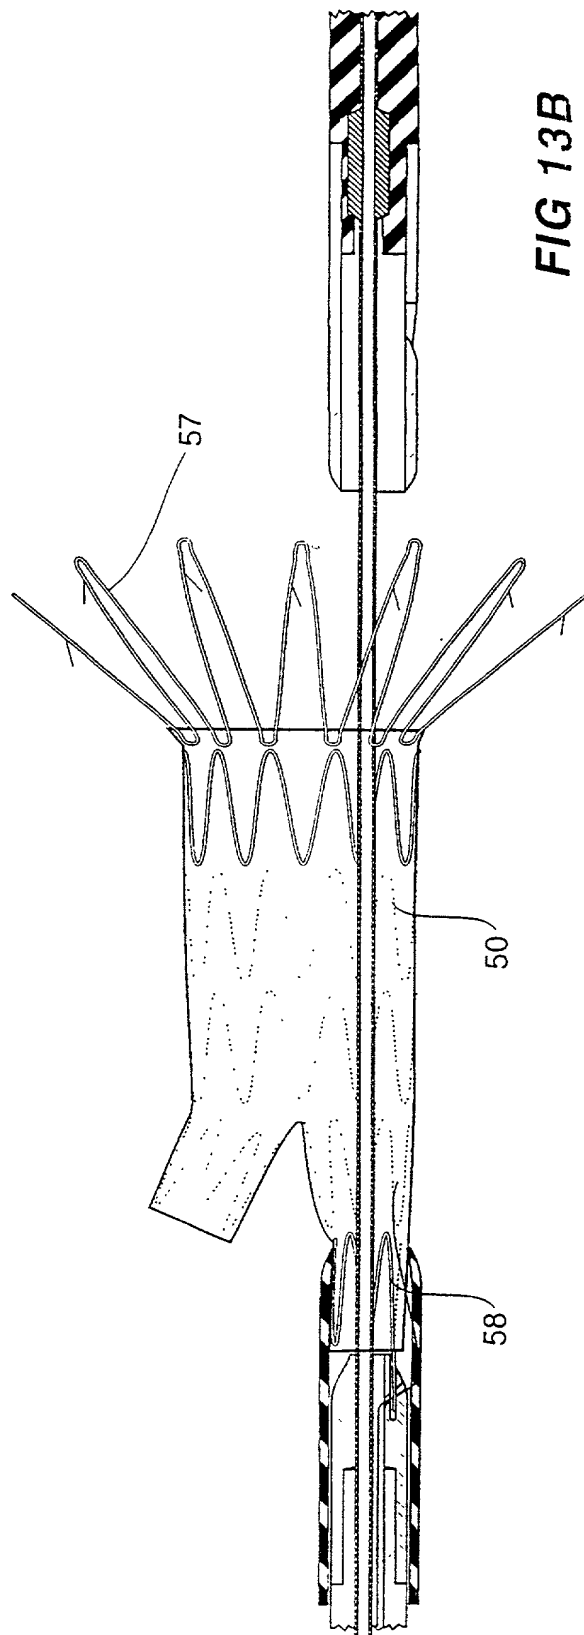

**FIG 13B**

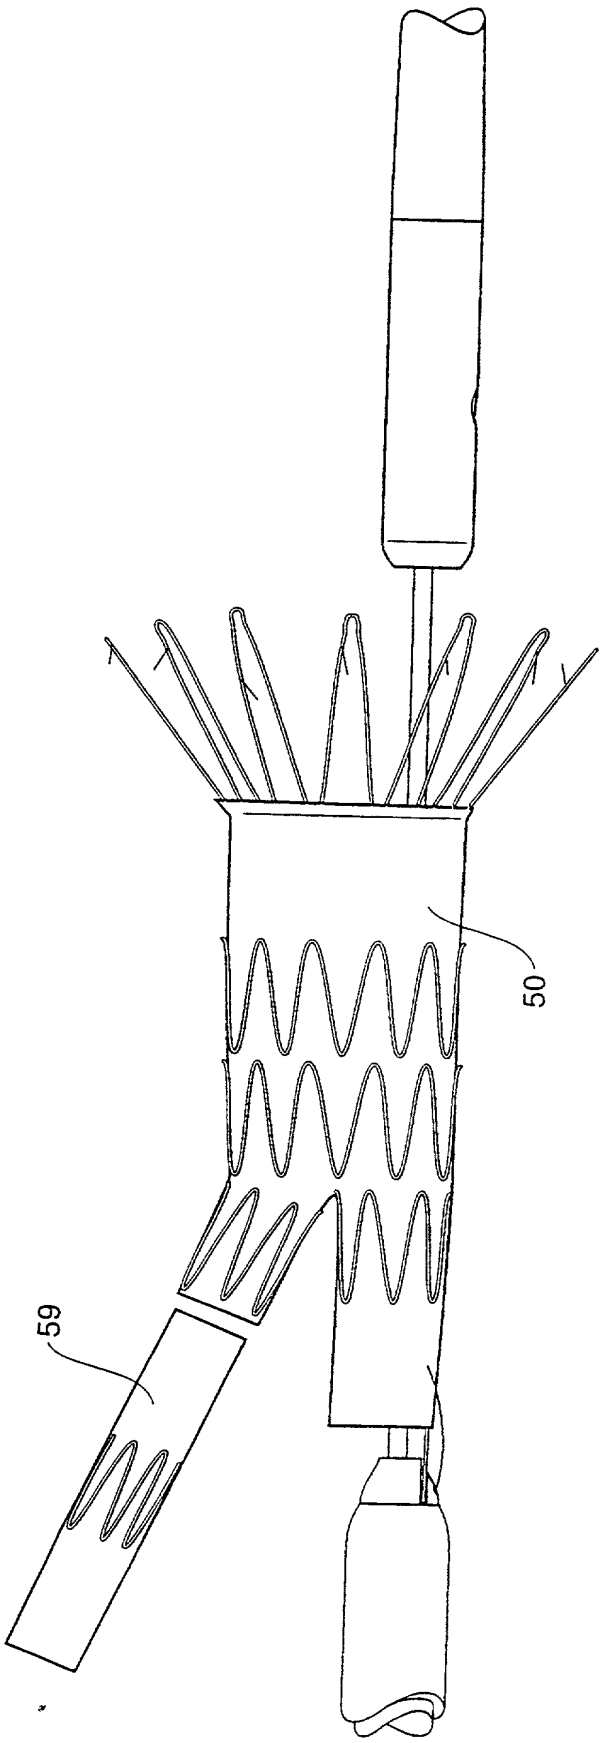


FIG 13C





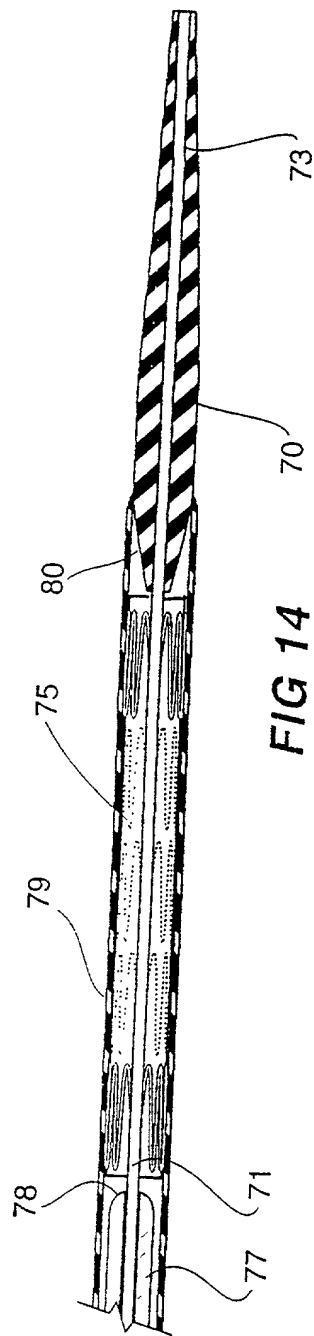



FIG 14

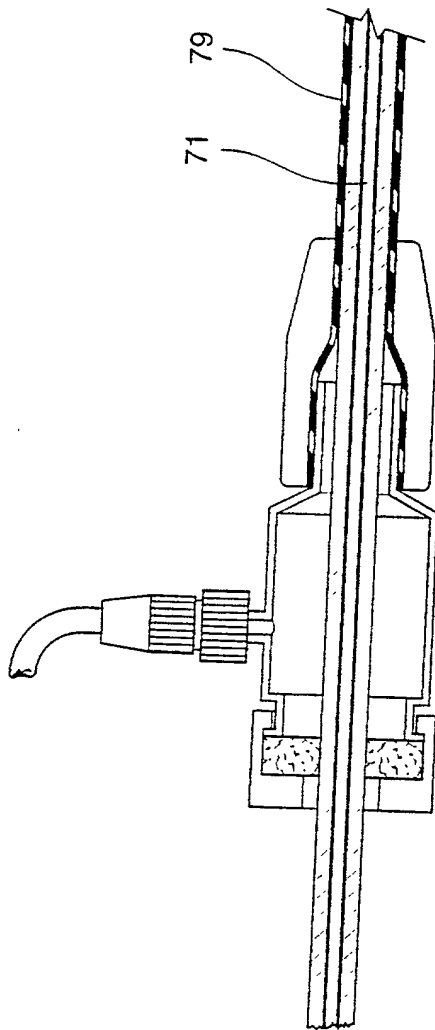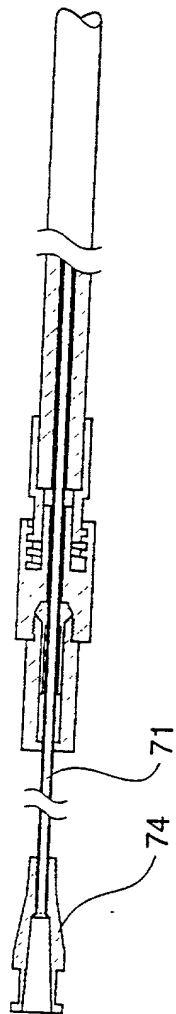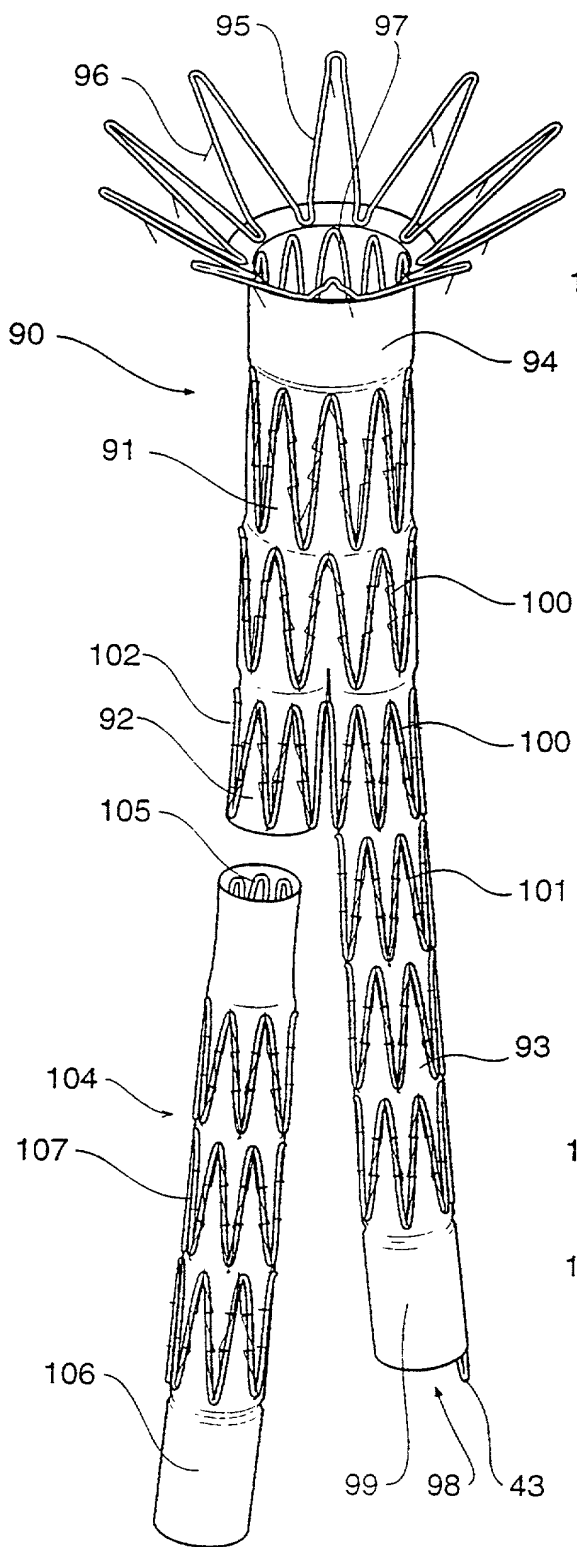


**FIG 15**

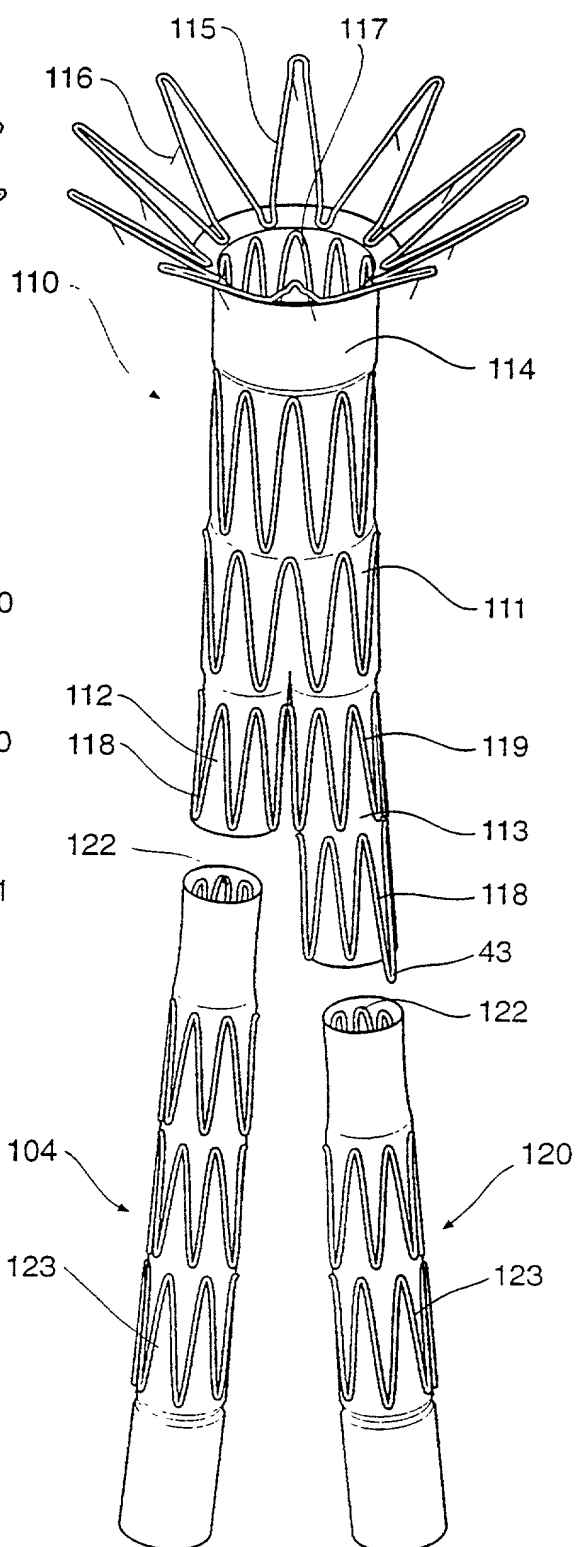

**FIG 16**

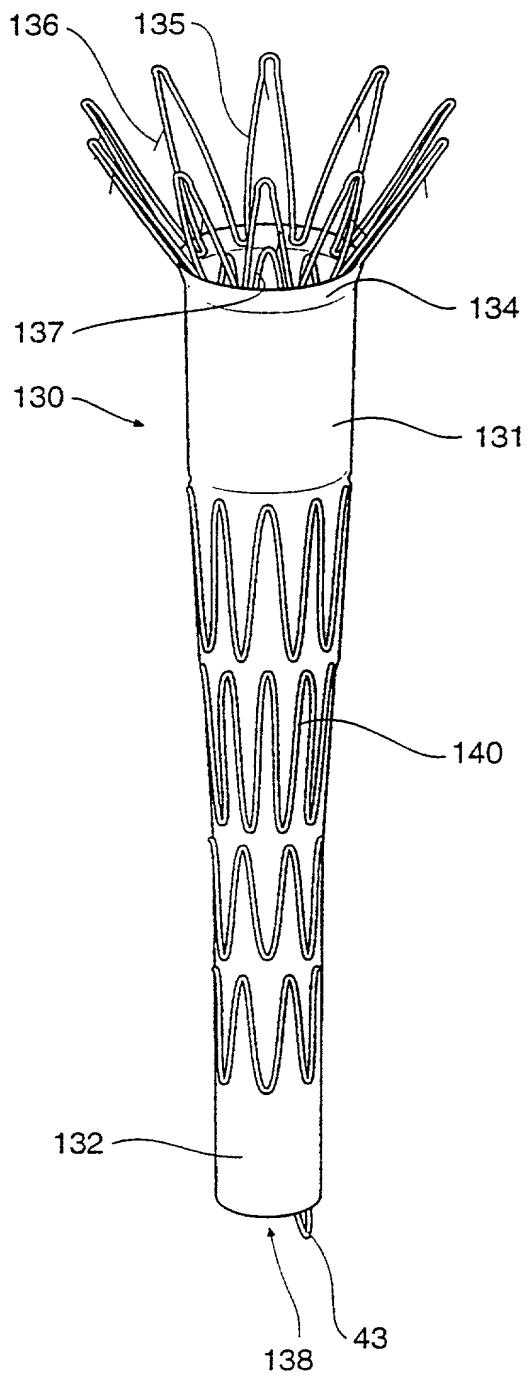

**FIG 17**

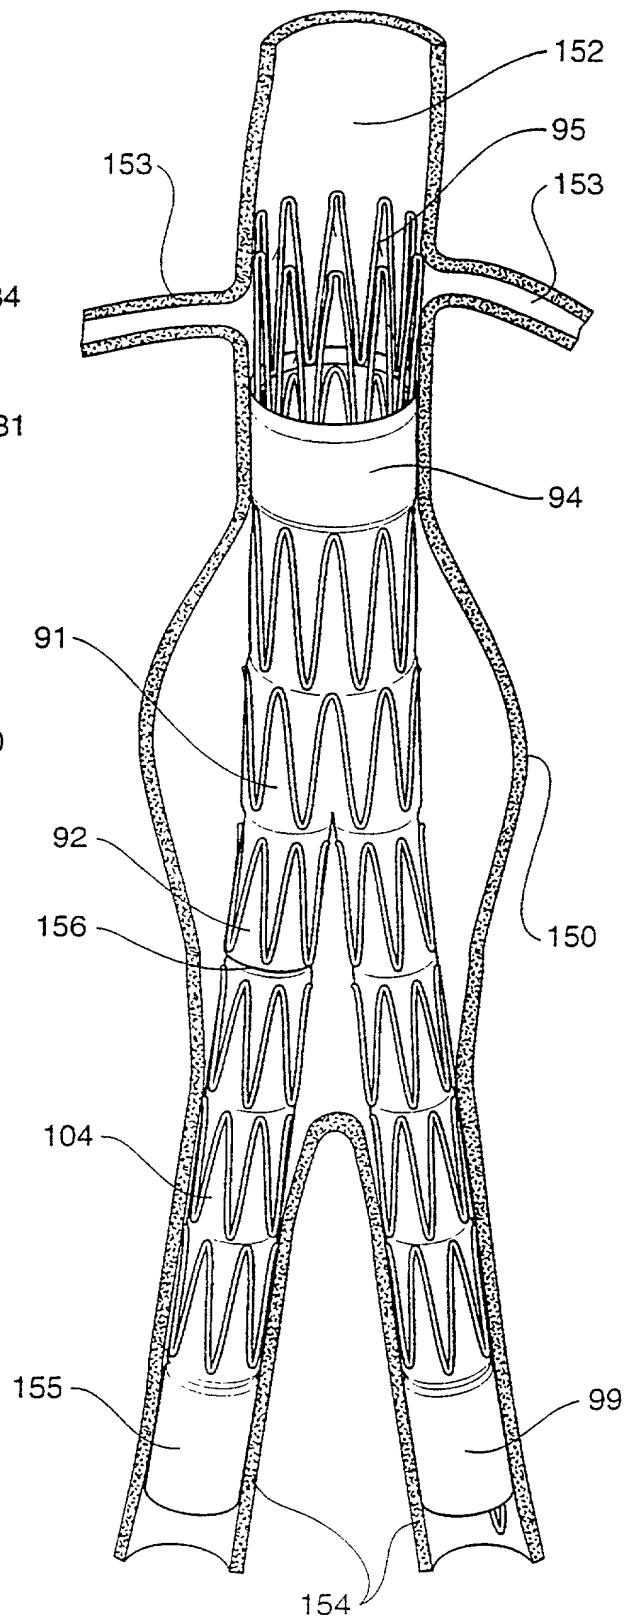

**FIG 18**

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

<b>DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION</b> <b>(37 CFR 1.63)</b>  <input checked="" type="checkbox"/> Declaration Submitted with Initial Filing      OR <input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)	Attorney Docket Number	
	First Named Inventor	
	<b>COMPLETE IF KNOWN</b>	
	Application Number	/
	Filing Date	
	Group Art Unit	
	Examiner Name	

**As a below named inventor, I hereby declare that:**

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**A PROTHESIS AND A METHOD AND MEANS OF DEPLOYING A PROTHESIS**

the specification of which *(Title of the Invention)*

☐ is attached hereto  
OR  
☒ was filed on (MM/DD/YYYY) **05/25/1998** as United States Application Number or PCT International

Application Number **PCT/AU98/00383** and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
P07008	Australia	05/26/1997	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)

☐ Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)  
Approved for use through 9/30/00. OMB 0651-0032  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

## DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
PCT/AU98/00383	05/25/1998	

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: ☐ Customer Number  OR ☒ Registered practitioner(s) name/registration number listed below

Place Customer Number Bar Code Label here

Name	Registration Number	Name	Registration Number
Anton P. Ness	28,453		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number or Bar Code Label  OR ☒ Correspondence address below

Name	Anton P. Ness				
Address	Cook Group Patent Office				
Address	P.O. Box 2269				
City	Bloomington	State	IN	ZIP	47402-2269
Country	USA	Telephone		Fax	

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:		<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle (if any))		Family Name or Surname			
David		HARTLEY			
Inventor's Signature	<i>DE Hartley</i>			Date	14-7-99
Residence: City	SUBIACO	State	WA	Country	AUSTRALIA
				Citizenship	AU
Post Office Address	2 View Street				
Post Office Address	SUBIACO				
City		State	WA	ZIP	6008
				Country	AUSTRALIA

☐ Additional inventors are being named on the \_\_\_\_\_ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto




Please type a plus sign (+) inside this box → ☐

PTO/SB/02A (3-97)  
Approved for use through 9/30/98. OMB 0651-0032  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

+

## DECLARATION

ADDITIONAL INVENTOR(S)  
Supplemental Sheet  
Page \_\_\_\_ of \_\_\_\_

Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle [if any])				Family Name or Surname			
Michael				LAWRENCE-BROWN			
Inventor's Signature						Date	
		17/07/98					
Residence: City		State		WA		Country	
		AUSTRALIA		Citizenship		AU	
Post Office Address		36 Shann Street					
Post Office Address		FLOREAT					
City		State		WA		ZIP	
		6014		Country		AUSTRALIA	
Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle [if any])				Family Name or Surname			
Inventor's Signature						Date	
Residence: City		State				Country	
						Citizenship	
Post Office Address							
Post Office Address							
City		State				ZIP	
						Country	
Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle [if any])				Family Name or Surname			
Inventor's Signature						Date	
Residence: City		State				Country	
						Citizenship	
Post Office Address							
Post Office Address							
City		State				ZIP	
						Country	

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

+

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re Application of:

William A. Cook Australia Pty Ltd

Atty. Docket No.: PA-5169-CON

International Application No.: PCT/AU98/00383

Title: A PROSTHESIS AND A METHOD AND MEANS OF DEPLOYING A PROSTHESIS


**Associate Power of Attorney**

I, Richard J. Godlewski, Esq., having a principal address at P.O. Box 2269, Bloomington, Indiana, 47402, having previously been given a power of attorney for the above-referenced matter, hereby appoint as an associate power of attorney:

Anton P. Ness, Reg. No. 28,453  
P.O. Box 2269  
Bloomington, IN 47402  
812-330-1824  
812-330-9049 (fax)

for additional representation in the above-mentioned matter and any subsequent matter arising thereunder. Please continue to address all correspondence to Anton P. Ness at the above address.

11/24/99  
Date

  
Richard J. Godlewski  
Reg. No. 30,056